

Specifications:

Current rating:5.0 AC/DC

Voltage rating:250V AC/DC

Contact resistance:20m ohm. max.

Insulator resistance:1000M ohm. Min.













Withstanding voltage:1500V AC for one minute

Operating temperature range:-25°C to + 105°C

Application wire:AWG#26 TO #18

Material and Finish:

Insulator:high Temp. Plastic(UL94V-2)

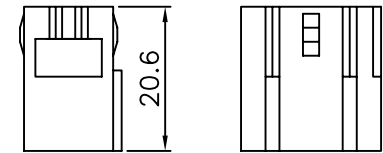

PS-S-3X02

PS-S-3X03

PS-S-3X04

PS-S-3X05

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X.±  
.X±  
.XX±  
.XXX±  
ANG±



ORDER INFORMATION

PS-S-3Xxx-LF  
SERIES | LEADFREE  
3X02:06 WAY  
3X05:15 WAY  
FEMALE HOUSING

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: