
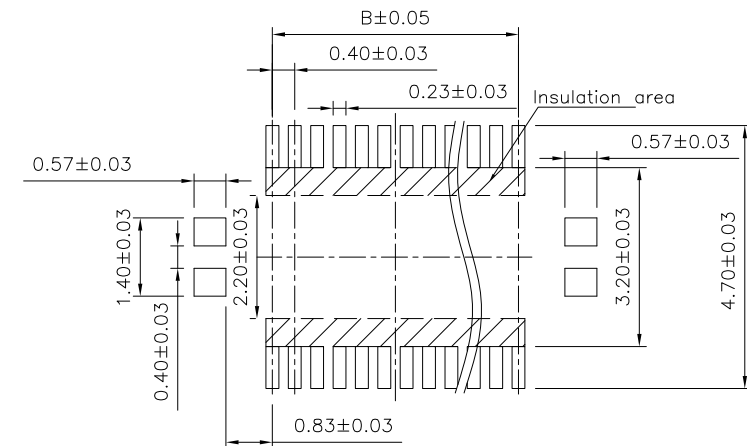
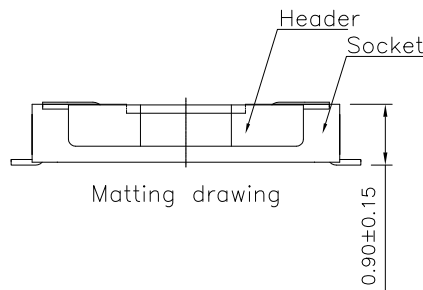


Specifications:

1. Current Rating : 0.3A AC/DC
2. Voltage Rating : 30V AC/DC
3. Contact Resistance : 80m ohm. max.
4. Insulation Resistance : 1000M ohm. min.at 250V DC
5. Withstanding Voltage :150V AC for one minute
6. Operating Temperature Range : -55°C to +85°C

Material and Plated

- 1.Housing : High Temp Plastic. (UL94V-0)
- 2.Contact : Copper Alloy
- 3.Plated : Gold Plated



PCB Layout

Circuits	Dim.A	Dim.B	Circuits	Dim.A	Dim.B
10	3.74	1.60	40	9.74	7.60
20	5.74	3.60	50	11.74	9.60
24	6.54	4.40	60	13.74	11.60
30	7.74	5.60	70	15.74	13.60

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

DRAWING BY CY

X. ±

CHECKED BY GENIUS

.X ± 0.20

UNIT / mm

SCALE 1 : 1

.XX ± 0.15

DATE

.XXX ±


ANG ±

煜倫股份有限公司

www.morethanall.com

SIZE A4

PJECTION



ORDER INFORMATION

NP0433-P01X-xxx-LF

SERIES

LEADFREE

010~070WAY

NON POST

UNMATED HIGH 0.1mm

MALE

DESCRIPTION: 0.4mm Board To Board Plug Matting Height 0.90mm