
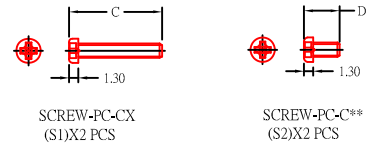


2.MATERIAL:
INSULATOR: PBT UL94V-0 BLACK
CONTACTS: COPPER ALLOY,
GOLD PLATED ON CONTACT AREA,
TIN PLATED ON SOLDER TAIL.
GUIDE/PUSH BUTTON: PBT, UL94V-0

3.ELECTRICAL:
CURRENT RATING: 0.5A AC, DC
TEMPERATURE RANGE: -20°C ~ +60°C
INSULATION RESISTANCE: 1000M Ω MIN.(500V DC)
CONTACT RESISTANCE: 40mΩ MAX.
WITHSTANDING VOLTAGE: 500V AC/MINUTE

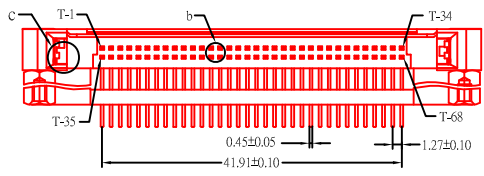


Pin Type	Interface Dim.	Pin No.
Detect	3.50 mm	36, 67
General	4.25 mm	all other pins
Power	5.00 mm	1, 17, 34, 35, 51, 68

Ordering Information

A \ B	DIM. B = 1.1 mm (0) Voltage 5V	DIM. B = 2.2 mm (V) Voltage 3.3V	DIM.C	DIM.D
(O) A = 0.0mm	PCC-PRL00V5-68	PCC-PRL00V3-68	8	8
(G) A = 2.2mm	PCC-PRL22V5-68	PCC-PRL22V3-68	10	4
(U) A = 4.0mm	PCC-PRL40V5-68	PCC-PRL40V3-68	12	4
(J) A = 5.0mm	PCC-PRL50V5-68	PCC-PRL50V3-68	13	4


RoHS Compliant

TOLERANCES ARE

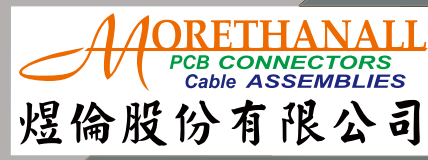


DRAWING BY CY
CHECKED BY GENIUS
UNIT / mm SCALE 1 : 1
DATE
SIZE A4 PPROJECTION

X. ±
.X ± 0.05
.XX ± 0.01
.XXX ±
ANG ±



ORDER INFORMATION

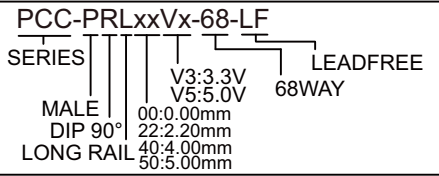

DESCRIPTION: PC68PIN公座單層無推杆有支架墊高XX卡槽2.2/1.1前螺絲後六角螺絲標準支架無支架固定鋼片成品

www.morethanall.com