


SPECIFICATIONS
BARRIER MATERIAL: THERMOPLASTIC (UL 94V-0).BLACK
TERMINALS TIN PLATED BRASS
CREWNICKEL PLATED STEEL
WIRE RANGE 14-22 STRA
RATING: 10AMPRES. 250 VAC
INSULATION WITHSTANDS VOLTAGE AC 2000V
NSULATION RESISTANCE 500M OR MORE AT DC 500V

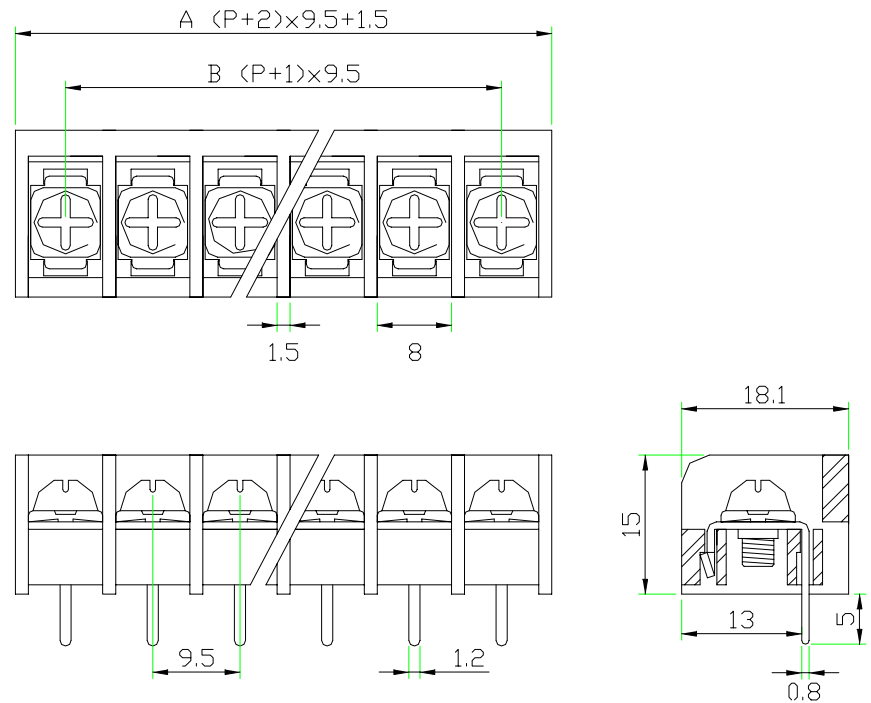

| | | | | | | | | | | | | | | | | | |
|-------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| POLE | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | | | |
| A | 20.5 | 30 | 39.5 | 49 | 58.5 | 68 | 77.5 | 87 | 96.5 | 106 | 115.5 | 125 | 134.5 | 144 | | | |
| B | 9.5 | 19 | 28.5 | 38 | 47.5 | 57 | 66.5 | 76 | 85.5 | 95 | 104.5 | 114 | 123.5 | 133 | | | |
| POLE | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 | 32 |
| A | 153.5 | 163 | 172.5 | 182 | 191.5 | 201 | 210.5 | 220 | 229.5 | 239 | 248.5 | 258 | 267.5 | 277 | 286.5 | 296 | 305.5 |
| B | 142.5 | 152 | 161.5 | 171 | 180.5 | 190 | 199.5 | 209 | 218.5 | 228 | 237.5 | 247 | 256.5 | 266 | 275.5 | 285 | 294.5 |

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY


CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4 PPROJECTION

X, ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±



ORDER INFORMATION

TBC095-D-xx-LF
 SERIES | LEADFREE
 02~32WAY
 DIP 180°

DESCRIPTION: