




RECOMMENDED P. C. B LAYOUT TOP VIEW
(COMPONENT SIDE TOLERANCE ± 0.05)

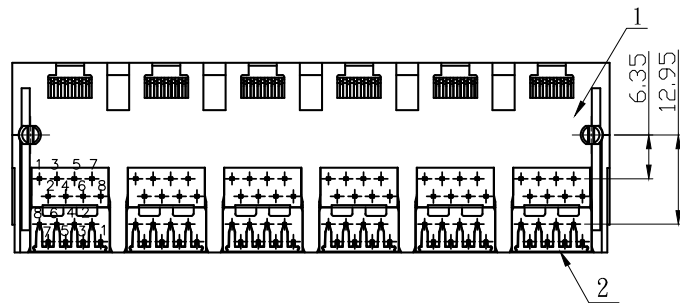

Detail A Scale 4

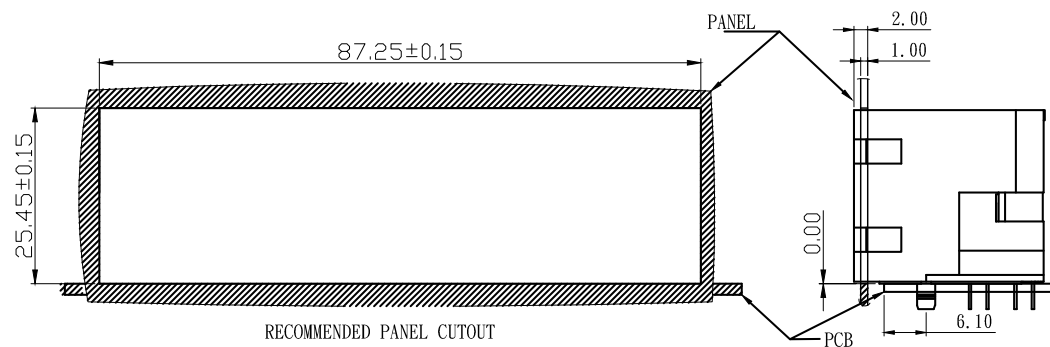

RECOMMENDED PANEL CUTOUT

注:

1. Housing: Glass Filled PA6T+30%G. F BLACK UL94V-0 (RoHS).
 2. Insert: Glass Filled PA6T+30%G. F BLACK UL94V-0 (RoHS).
 3. Contact: 0.35X0.44mm Phosphor Bronze gold Plating OverNickel (RoHS).
- ※MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.
※凡标注▲记号为重点尺寸。

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

P PROJECTION

X. ±
.X ± 0.25
.XX ± 0.15
.XXX ± 0.05
ANG ±



ORDER INFORMATION

MJ24B6-KX01-0808-LF

SERIES | G/F | LEADFREE
NON EAR
BLACK

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: