


Notes:

1. Current Rating : 2A
3. Contact Resistance : 20mΩ Max.
4. Insulator Resistance : 100MΩ Min / 100V DC
5. Withstanding Voltage : 1000V AC for 1 Minute.
6. Temperature Range : -55~105°C
8. Insertion Force : 160 Pin 150N max.
9. Withdrawal Force : 0.15N Min. per individual contact

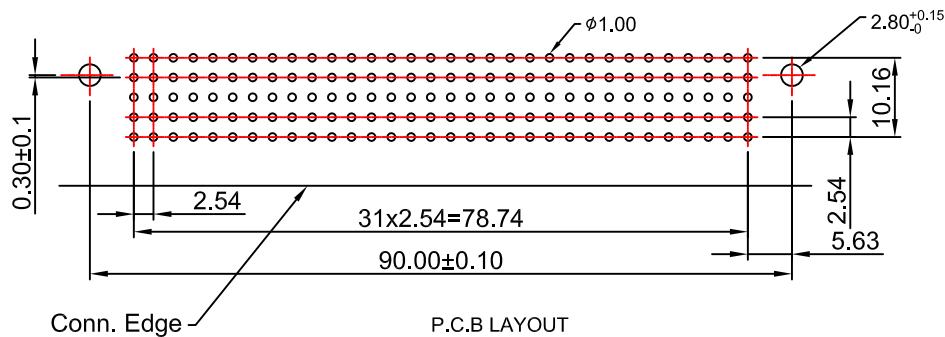

2	Contact	Brass	xxx
1	Housing	PBT+30%GF, UL94V-0	1
No.	Part Name	Specifications	Qty

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PJECTION

X. ± 0.35
.X ± 0.20
.XX ± 0.15
.XXX ± 0.10
ANG ±



ORDER INFORMATION

UE-SP17-5X32-LF
SERIES | LEADFREE
160 WAY
PRESS FIT DIP 180° 17.0mm
FEMALE

DESCRIPTION: DIN41612, Type E, DIP Female, Vertical, 魚眼端子, 針長 17mm

www.morethanall.com