
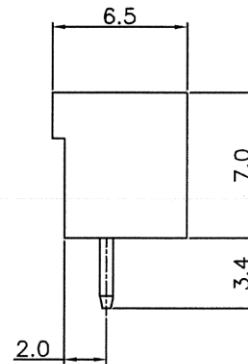



DIMENSIONS:

CIRCUITS	DIM. A	DIM. B	DIM. C
2	2.50	5.9	7.5
3	5.00	8.4	10.0
4	7.50	10.9	12.5
5	10.00	13.4	15.0
6	12.50	15.9	17.5
7	15.00	18.4	20.0
8	17.50	20.9	22.5
9	20.00	23.4	25.0
10	22.50	25.9	27.5
11	25.00	28.4	30.0
12	27.50	30.9	32.5
13	30.00	33.4	35.0
14	32.50	35.9	37.5
15	35.00	38.4	40.0

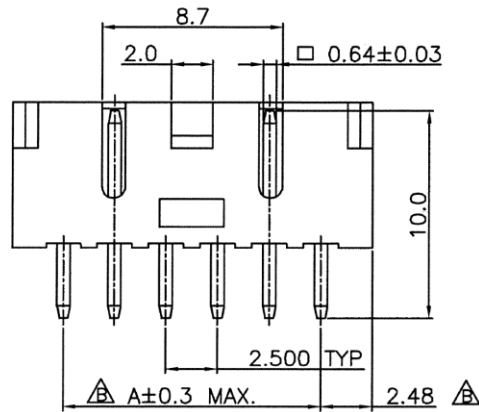


NOTES:

- MATERIAL: BASE: GLASS-FILLED NYLON 66 94V-0
CONTACT PIN: BRASS

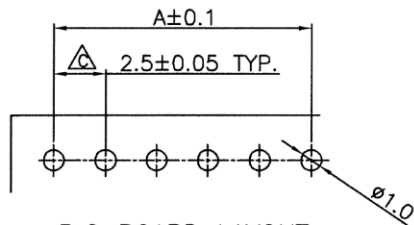


P.C BOARD LAYOUT
P.C BOARD THICKNESS: 1.60
(GENERAL TOLERANCE ±0.05)




RoHS Compliant

TOLERANCES ARE

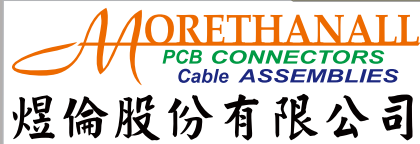

DRAWING BY CY
CHECKED BY GENIUS
UNIT / mm SCALE 1 : 1
DATE
SIZE A4 PPROJECTION

X, ± 0.50
.X ± 0.25
.XX ± 0.12
.XXX ± 0.08
ANG ±



ORDER INFORMATION

MS-DL-xx-LF
SERIES | LEADFREE
| 02~15WAY
| LOCK
| DIP 180°

DESCRIPTION:

www.morethanall.com