

Features:

- 4 ~ 24 circuits available
- Material: PA66 UL 94V-0
- Contact: Matte Tin-plated Brass

Specification:

- Current rating: 5A AC, DC
- Voltage rating: 300V AC, DC
- Insulation resistance: 1000MΩ Min.
- Dielectric withstanding voltage: 1500V AC/minute
- Ambient temperature range: -25° C ~ 90° C

CIRCUITS	Dimensions		
	A	B	C
04	4.14	9.83	—
06	8.28	13.97	—
08	12.42	18.11	—
10	16.56	22.25	—
12	20.70	26.39	—

CIRCUITS	Dimensions		
	A	B	C
14	24.84	30.56	8.28
16	28.98	34.70	10.35
18	33.12	38.84	8.28
20	37.26	42.98	10.35
22	41.40	47.12	10.35
24	45.54	51.26	10.35

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.40
.XX ± 0.25
.XXX ± 0.08
ANG ±

P PROJECTION



ORDER INFORMATION



ML-PRP-2Xxx-LF
SERIES | LEADFREE
2X02:04WAY
2X12:24WAY
POST
DIP 90°
MALE

DESCRIPTION:



煜倫股份有限公司

www.morethanall.com



4P





6P





8P





10P





12P





14P





16P





18P





20P

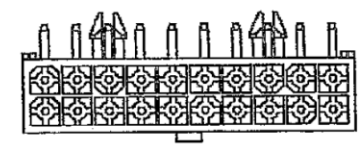

22P

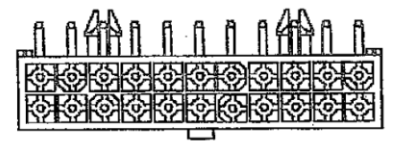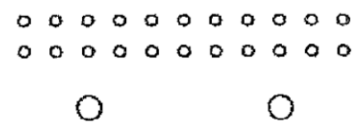

24P

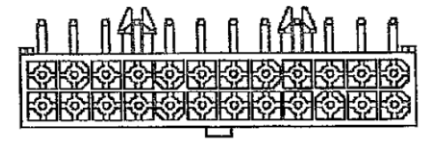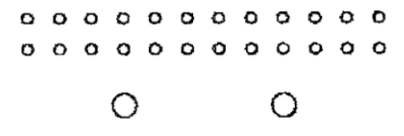

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.40
.XX ± 0.25
.XXX ± 0.08
ANG ±

P PROJECTION



ORDER INFORMATION

ML-PRP-2Xxx-LF
SERIES | LEADFREE
2X02:04WAY
2X12:24WAY
POST
DIP 90°
MALE

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: