



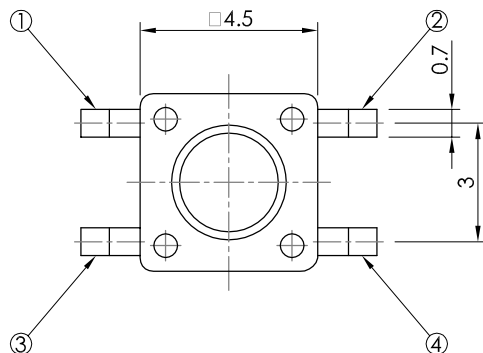

CIRCUIT DIAGRAM



SPECIFICATION

Rating: DC 12V, 50mA Max.

Circuit: 1C - 1P.

Operating force: 160±50g.



Contact resistance: 100mΩ Max. (initial)

Travel: 0.25±0.1mm.


Life: 100,000 Cycles Min.

Minimum load: 10mA 3.3V DC.(reference only)

Soldering temperature: 250°C Max for 3 Sec.

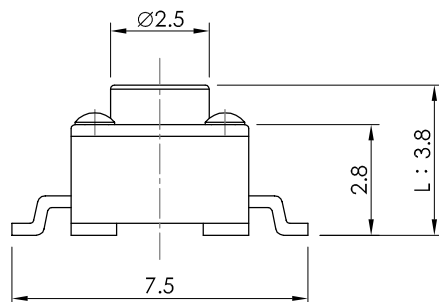

P.C BOARD MOUNTING HOLE DIMENSIONS



RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

TSW44-Vxx-xxx-LF

SERIES | LEADFREE
160:160g
250:250g
38:3.8mm HIGH
70:7.0mm HIGH
180°SMT

DESCRIPTION: