

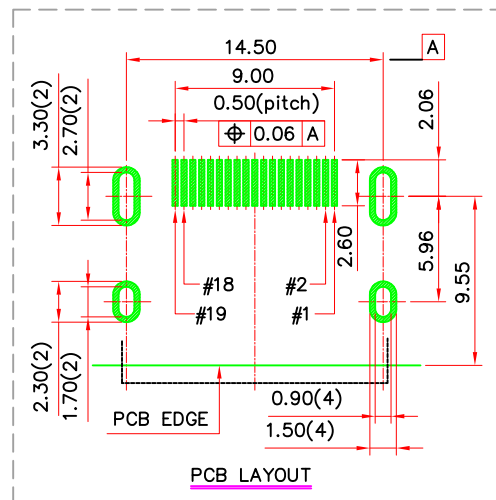
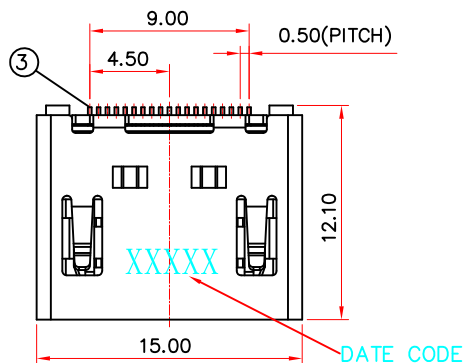

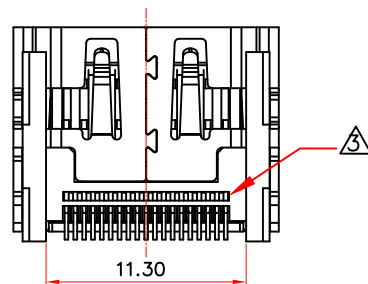

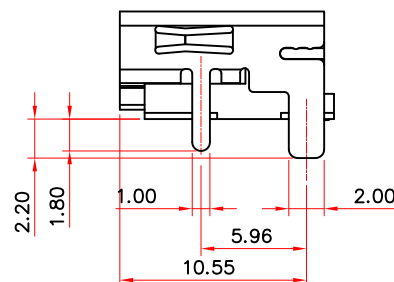


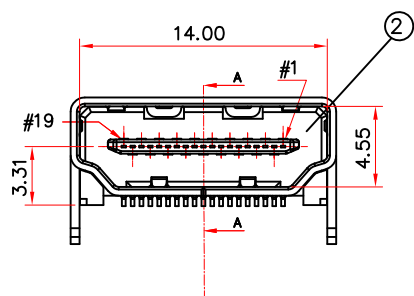

ITEM 項目	PARTS NAME 零件名稱	Q'TY 數量	MATERIAL 材質	FINISH/REMARK 處理/備註
1	SHELL	1	COPPER ALLOY	Ni: 50u"
2	HOUSING	1	SYNTHETIC RESIN	BLACK
3	CONTACT	19	COPPER ALLOY	Gold Flash; Tin: 100~120u"; Ni: 50u"

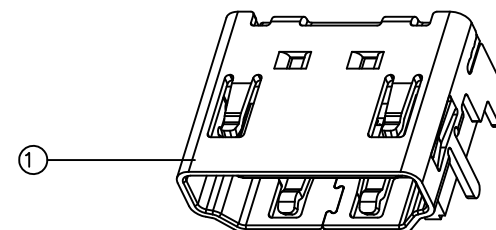

SECTION A-A
SCALE 2/1

SPECIFICATION

MATERIAL

See drawing

STANDARD DATA

Rating current: 0.5A

Operating temperature: -40°C ~ +85°C

Storage temperature: -20°C ~ +85°C

ELECTRICAL

Insulator resistance: 100 Mohms Min. @ 500 VDC

Withstanding voltage: 500 VAC/minute

Contact resistance: 60 mohms Max.

MECHANICAL

Insertion force: 44.1N(4.5Kgf) Max.

Withdrawal force: 9.8~39.2N(1.0~4.0Kgf).

Durability: 10000 cycles Min.

Contact retention force: 2.1N(0.21Kgf) Min.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X. ± 0.50
.X ± 0.30
.XX ± 0.20
.XXX ±
ANG ± 5°





ORDER INFORMATION

HDMI-SWMR-19-LF




SERIES | LEADFREE
19WAY
REEL
METAL FOOT
90° SMT
FEMALE

DESCRIPTION: HDMI CONNECTOR

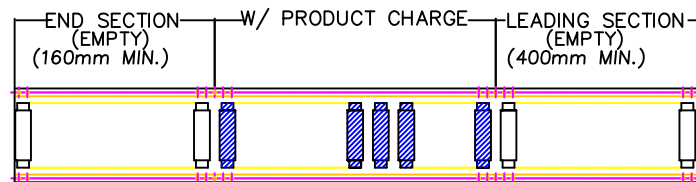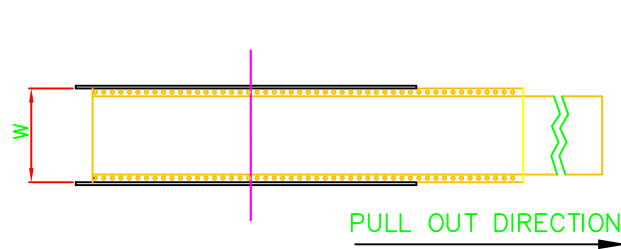


ITEM 項目	PARTS NAME 零件名稱	FINISH/REMARK 處理/備註
1	I/O CONNECTOR	3000 PCS/BOX
2	BOX	10 REEL/BOX
3	WATERPROOF BAG	1 PCS
4	REEL	300 PCS/REEL
5	COVER TAPE	Wide=32mm
6	CARRIER TAPE	--
7	LABEL	批號標籤


TOP COVER TAPE

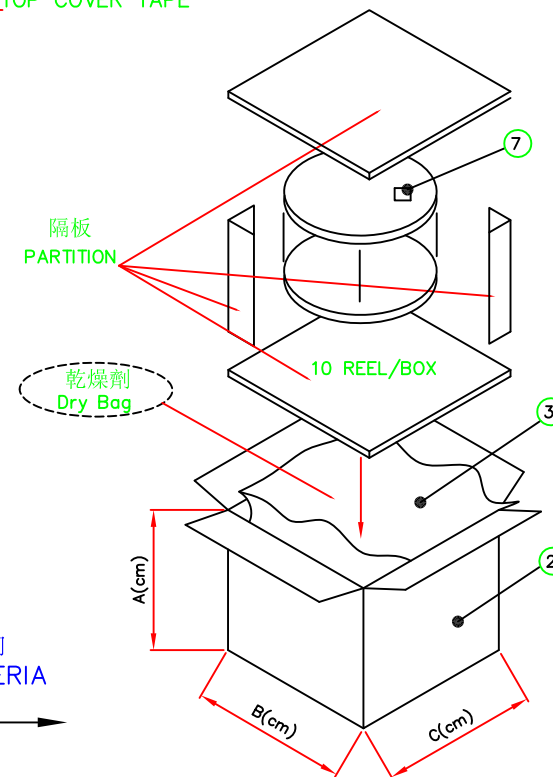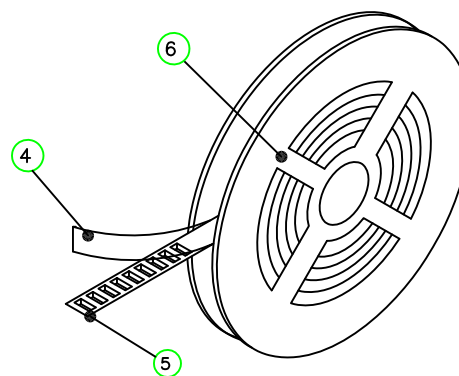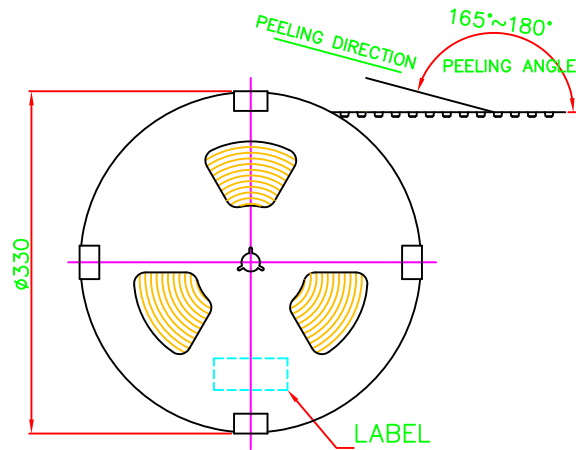

收料方向
CATCHER MATERIAL
DIRECTION

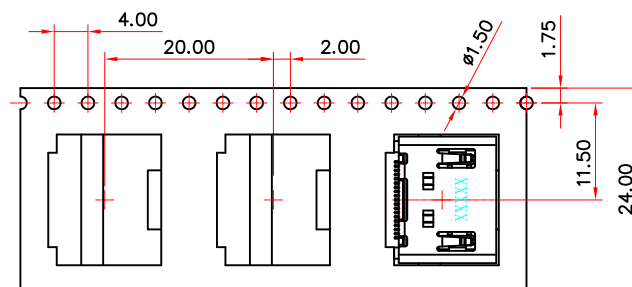

客戶放料方向
INPUT MATERIA
DIRECTION



NOTES

- 1.MATERIAL: PS (Color: 透明)
- 2.DEFORMATION(變形)&DAMAGE(損壞): NA.(不可)
- 3.All dimensions meet EIA-481-C requirements.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

HDMI-SWMR-19-LF

SERIES

LEADFREE

19WAY

REEL

METAL FOOT

90° SMT

FEMALE

DESCRIPTION: HDMI CONNECTOR