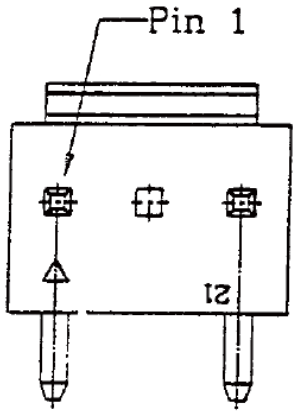

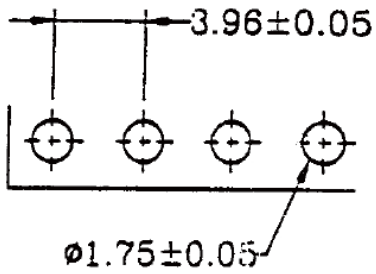

Material: Insulator: Nylon 66 UL 94V-0
Contact: 1.14mm Tin Plated Square Pin
D: Void 2nd Pin
Unit quantity: 1000 Pcs/Bag

P.C.B. LAYOUT

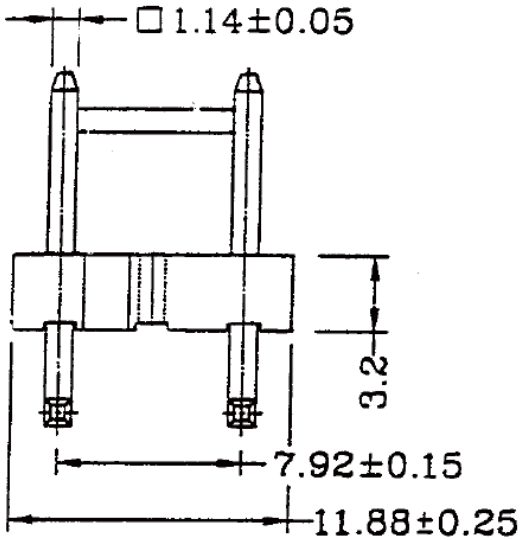

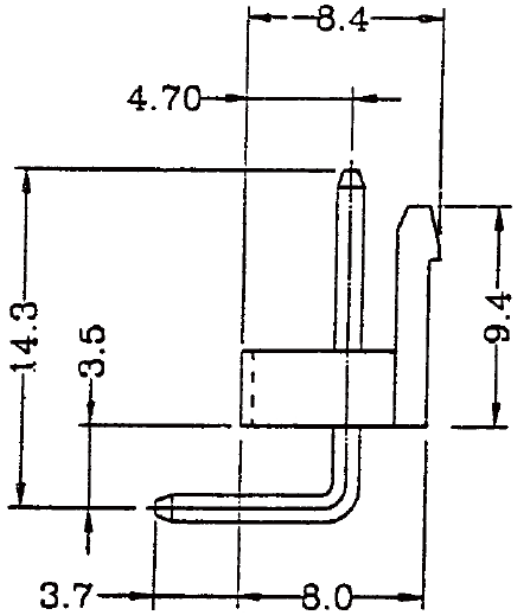

RoHS Compliant

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司
www.morethanall.com

DRAWING BY CY	TOLERANCES ARE
CHECKED BY GENIUS	X. ± .X ± .XX ± .XXX ± ANG ±
UNIT / mm SCALE 1 : 1	
DATE	
SIZE A4 PPOJECTION	



ORDER INFORMATION

VA-R-02-LF
SERIES
02WAY
LEADFREE
DIP 90°

DESCRIPTION: