


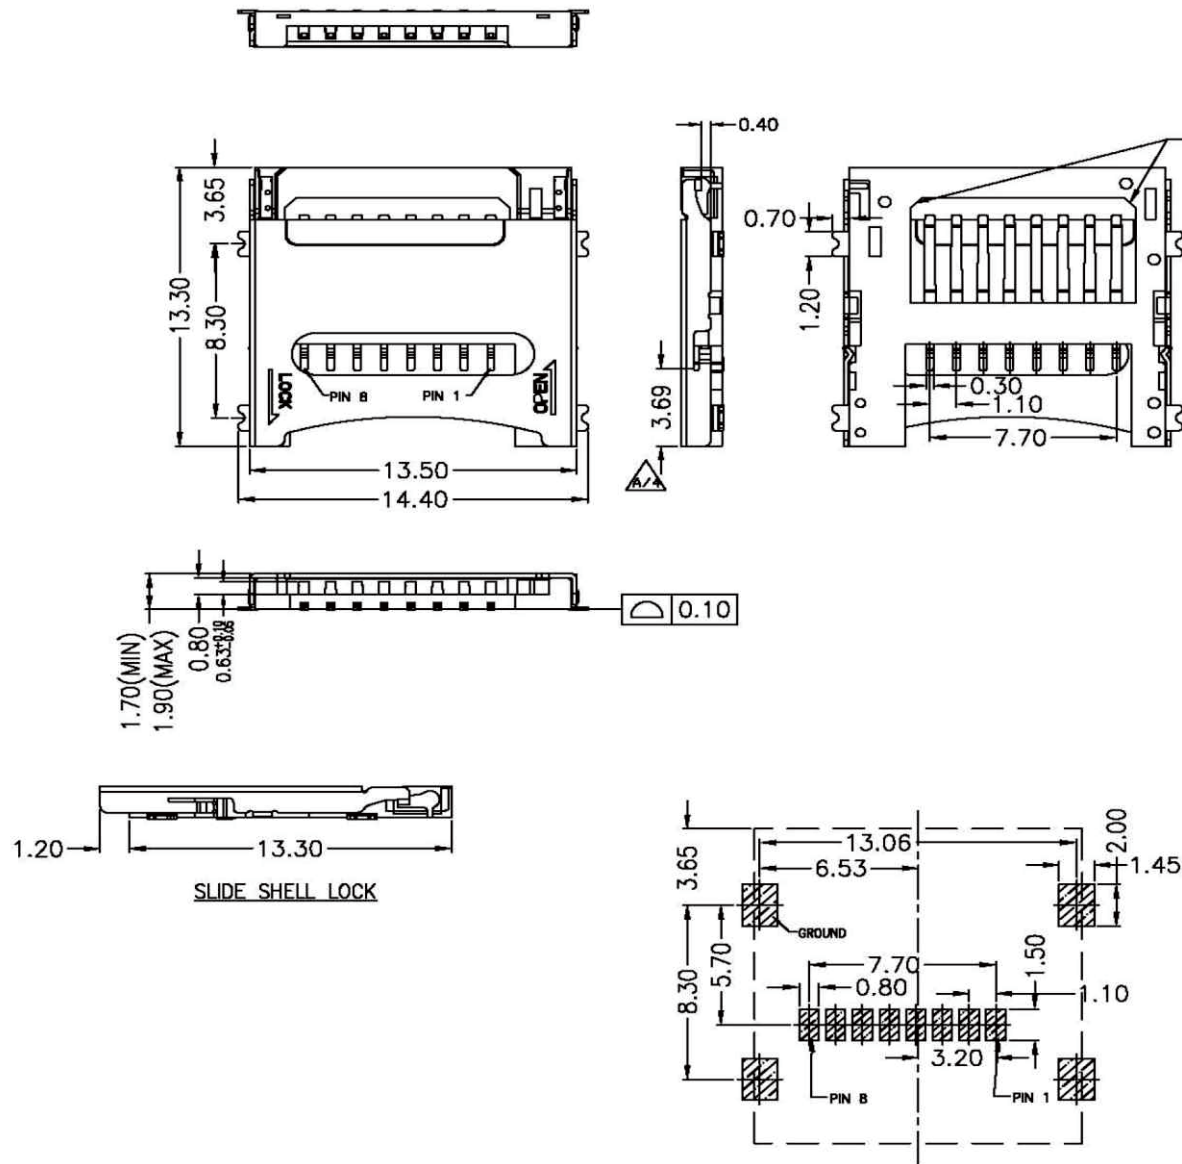

NOTES:

MATERIAL:

Housing: High Temperature Thermoplastic, UL 94V-0
 Contacts: Phosphor bronze
 Shell: Stainless Steel

PLATING:


Contacts: Plated 50 u" Ni Overall
 Plated Au Selective Contact Area
 Plated 100 u" Sn Over Ni On Solder Area

Electrical:

Current Rating: 0.5A max.
 Contact Resistance: 100mΩ max.
 Insulation Resistance: 1000MΩ min./500VDC
 Dielectric Withstanding Voltage: 500VAC/minute
 Operating Temperature: -25°C TO +85°C
 Mating Cycles: 10,000 times

Usable Memory Card:

Micro SD Card

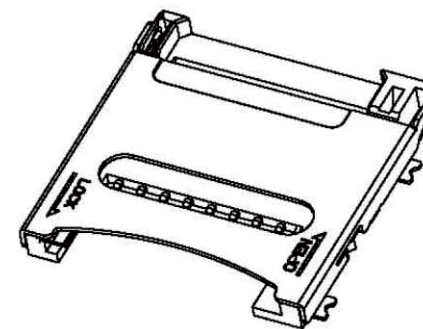





 煜倫股份有限公司 www.morethanall.com		RoHS Compliant		TOLERANCES ARE	
		DRAWING BY	CY	X. ±	
		CHECKED BY	GENIUS	.X ±	
		UNIT / mm	SCALE 1 : 1	.XX ±	
		DATE		.XXX ±	
		SIZE A4	PPOJECTION	ANG ±	





ORDER INFORMATION

TFC-WHCR-08-LF
 SERIES TFC WH CR 08 LF
 LEADFREE
 08WAY
 REEL
 C / LAYOUT
 HINGE
 90°SMT

DESCRIPTION:

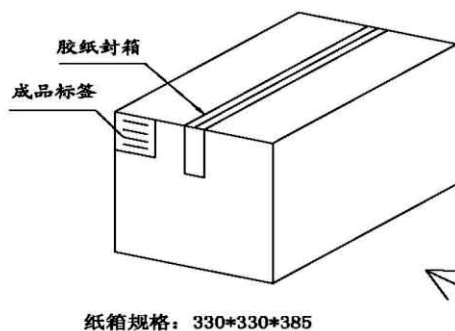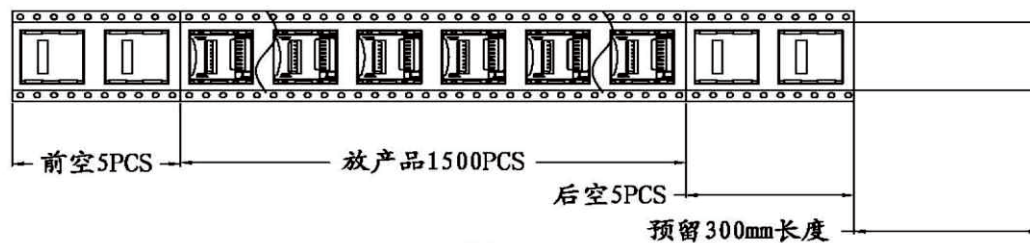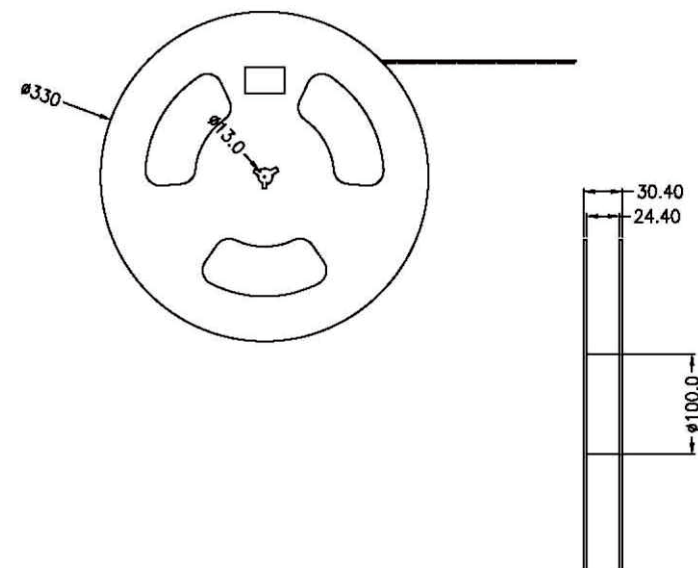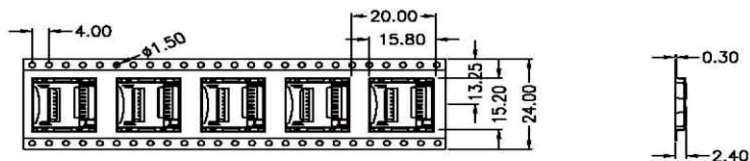

NO. 4

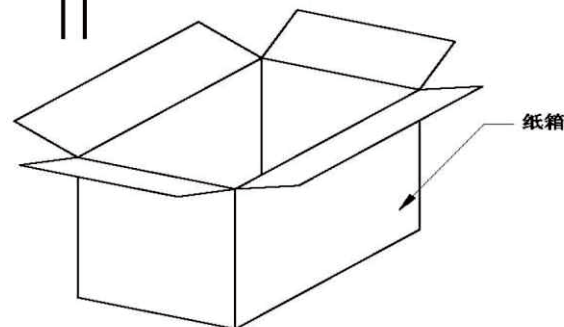

NO. 3

1. 材质要求:
 - 1.1 纸箱的材质要求为B-B; 外形尺寸为33*33*38.5CM;
 - 1.2 卷盘的材质为PVC; 卷盘的外形尺寸为 $\phi 330 \times 30.4$;
 - 1.3 卷带的材质为PVC; 卷带的外形尺寸为30200*24.4*2.7mm
2. 包装要求:
 - 2.1 将卷带放入包装机后, 前空5PCS, 后放产品1500PCS, 再后空5PCS; 上带留300MM长度。
 - 2.2 将包装好的产品从包装机上取下并包装好;
 - 2.3 把原叠好的12盘叠放入纸箱中共计18Knet;
 - 2.4 把包装好的成品打包封箱, 并在纸箱外贴上标签

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

TOLERANCES ARE

X. $\pm$

.X $\pm$

.XX $\pm$

.XXX $\pm$

ANG $\pm$

PPOJECTION ϕ



ORDER INFORMATION

TFC-WHCR-08-LF

SERIES T T T T LEADFREE
08WAY
REEL
C / LAYOUT
HINGE
90°SMT

DESCRIPTION: