


MATERLALS:

- 1.HOUSING:PBT(UL 94V-0) BLACK
- 2.TERMINAL:COPPER ALLOY GOLD FLASH PLATING ON CONTACT AREA UNDER PLATING NICKEL. (t=0.30mm)

SPECIFICATION:

- 1.CURRENT RATING:1 AMP. MAX.
- 2.DIELECTRIC WITHSTANDING VOLTAGE:500V AC P.M.S. FOR ONE MINUTE.
- 3.INSULATION RESISTANDING:500M OHMS MIN.AT 500V DC
- 4.CONTACT RESISTANCE:30m OHMS MAX.
- 5.OPERATING TEMPERATURE: -40°C TO +85°C.

100	63.60	62.865	68.40	68.40
80	50.90	50.165	55.70	55.70
68	43.28	42.545	48.08	48.08
60	38.20	37.465	43.00	43.00
50	31.85	31.115	36.65	36.65
44	28.04	27.305	32.84	32.84
40	25.50	24.765	30.30	30.30
34	21.69	20.955	26.49	26.49
30	19.15	18.415	23.95	23.95
26	16.61	15.875	21.41	21.41
22	14.07	13.335	18.87	18.87
20	12.80	12.065	17.60	17.60
16	10.26	9.525	15.06	15.06
14	8.99	8.255	13.79	13.79
10	6.45	5.715	11.25	11.25
PIN數	A	B	C	D
	尺寸			

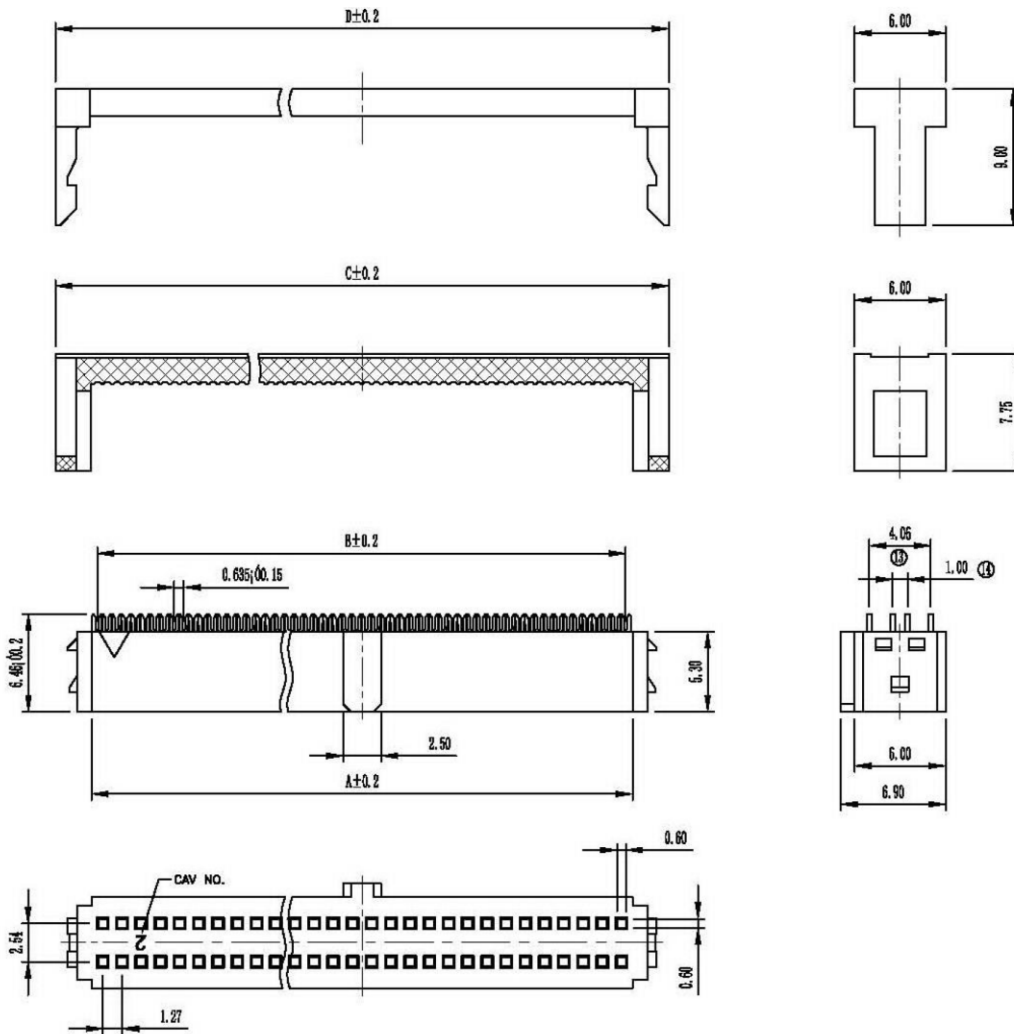

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

X. ± 0.30

CHECKED BY GENIUS

X. ± 0.20

UNIT / mm

SCALE 1 : 1

.XX ± 0.10

DATE

.XXX ± 0.03

ANG ±

SIZE A4

PPOJECTION

ORDER INFORMATION

HF-C3S-xxx-LF
 SERIES | LEADFREE
 010~100WAY
 0.635mm CABLE
 THREE TYPE

DESCRIPTION:

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com