
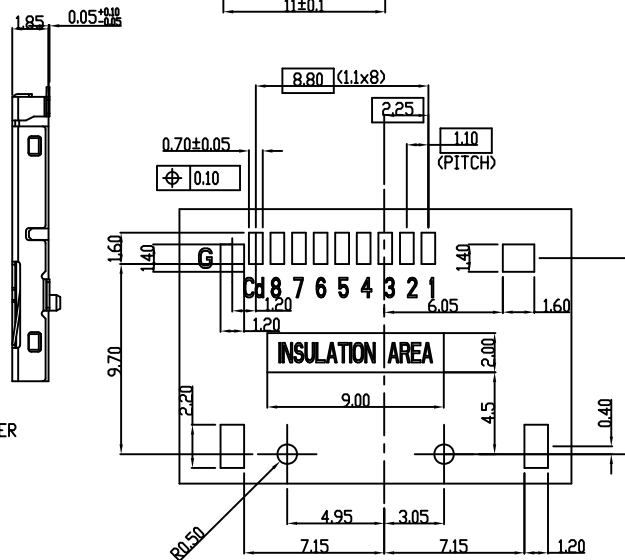
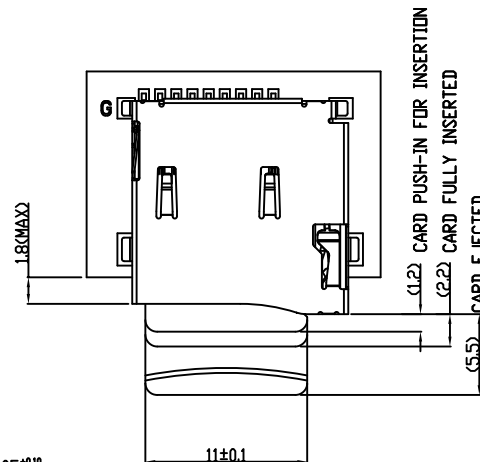


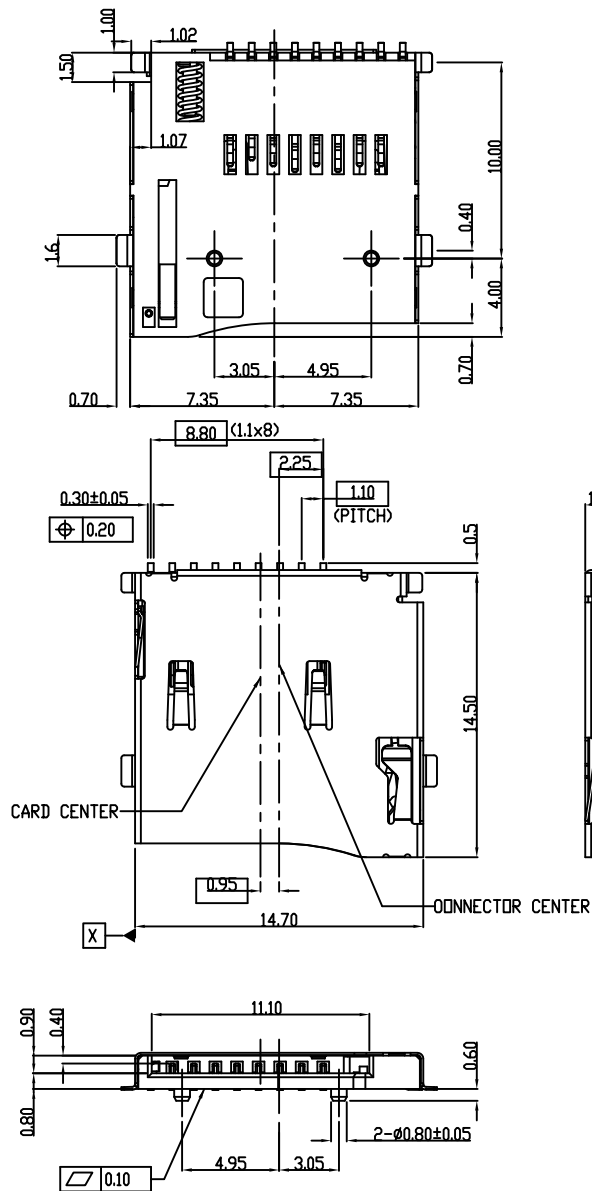

Material:
Plastic Body : LCP+35%GF, Color Black.
Slider : LCP+35%GF, Color Black.

Contact :Phosphor Bronze Alloy (C5210R-EH)
Contacts Plating:Contact area: Gold 10 micro inches (Min.)
Solder area: Gold flash
All under-plated Ductile Nickel 50 micro inches (Min.)

Shell :SUS304R-3/4H
Plating:
Contact area: Gold flash
Solder area: Gold flash
All under-plated Ductile Nickel 12 micro inches (Min.)

Spring : Piano Wire
Drag Link : SUS304

CARD DETECTION SWITCH			
WHEN CARD IS EJECTED	WHEN CARD IS INSERTED		
OPEN	CLOSE		
Cd	G		

PART NAME	Q'TY	MATERIAL
BODY	1	LCP+35%GF
SLIDER	1	LCP+35%GF
CONTACT	1	C5210R-EH
SHELL	1	SUS304R-3/4H
DRAW LINK	1	SUS304
SPRING	1	PIANO WIRE

PIN NUMBER	PIN ASSIGNMENT	PIN NUMBER	PIN ASSIGNMENT
1	DAT2	6	VSS
2	CD/DAT3	7	DAT0
3	CMD	8	DAT1
4	VDD	Cd	CARD DETECTION
5	CLK	G	GROUND

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ±
.XX ±
.XXX ±
ANG ±


PPOJECTION



ORDER INFORMATION


TFC-WPBP08R-08-LF
SERIES | | | | LEADFREE
90°SMT | | | | 08WAY
| | | | REEL
| | | | POST 8.0mm
| | | | BOTTOM CONTACT
| | | | PUSH PUSH

DESCRIPTION:Micro SD Socket Push-Push Type

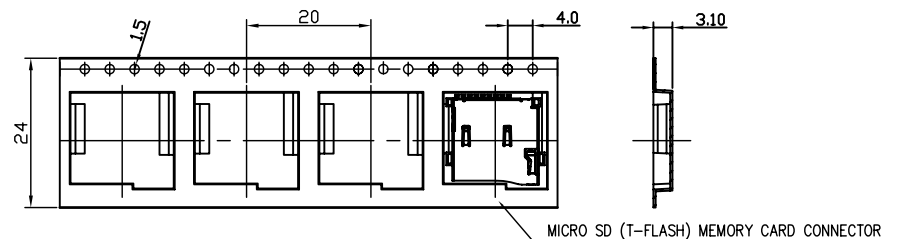

NOTES:

1. PACKING STYLE 1,000 PCS/REEL
2 REEL/INNER CARTON
10,000 PCS/OUTER CARTON
2. MATERIAL CARRIER TAPE:PS BLACK
COVER TAPE:PET FILM
REEL:PLASTIC
3. PEEL STRENGTH OF COVER TAPE:20-80g(PEEL SPEED 300mm/MINUTE).

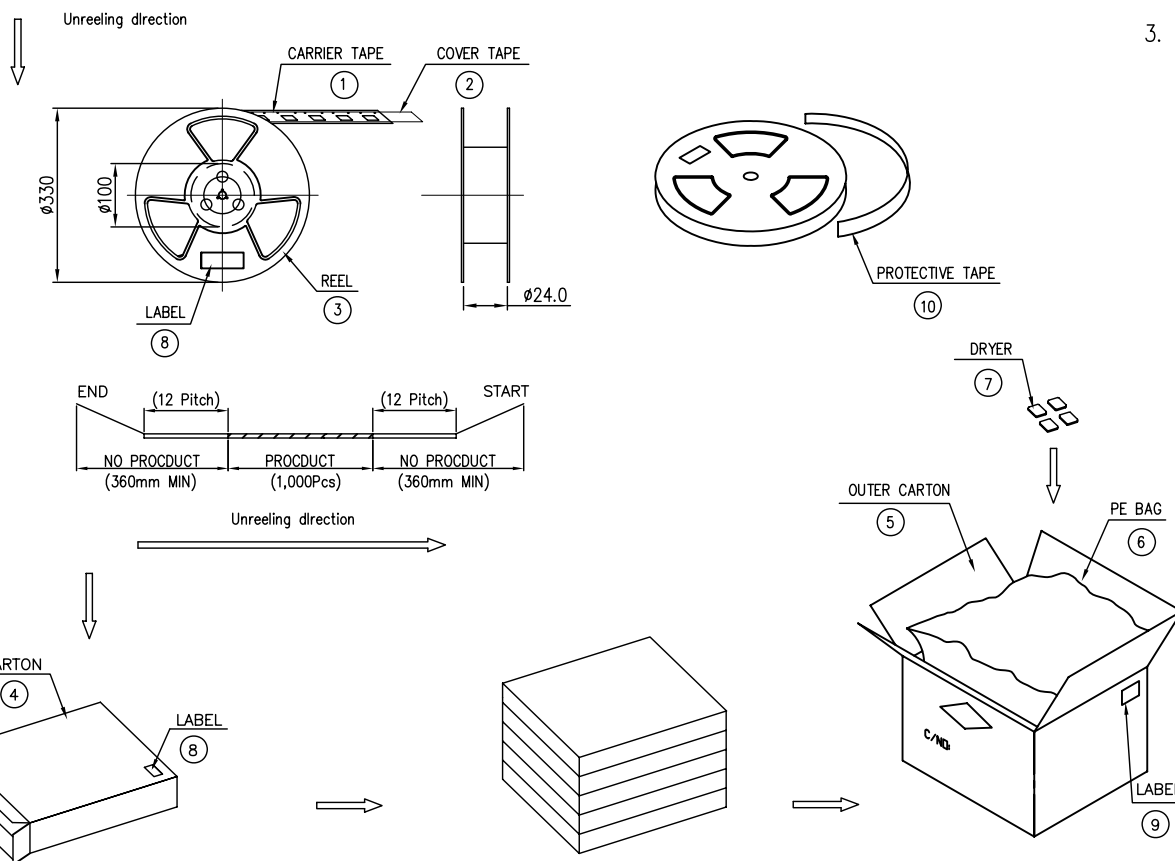

10	PROTECTIVE TAPE	1	PCS	
9	LABEL	1	PCS	
8	LABEL	15	PCS	
7	DRYER	4	BAG	
6	PE BAG	1	PCS	L850*W750mm
5	OUTER CARTON	1	PCS	
4	INNER CARTON	5	PCS	
3	REEL	10	SET	ø330*100mm,W=24mm
2	COVER TAPE	1,000	10	PCS
1	CARRIER TAPE			W=21.5mm,20.8M
				W=24mm,T=0.35mm,20.8M/REEL
NO	PACKING NAME	PCS/T PACKING	T/BOX QTY	UNIT
				NOTE

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

TFC-WPBP08R-08-LF
SERIES REEL LEADFREE
90°SMT POST 8.0mm
BOTTOM CONTACT
PUSH PUSH

DESCRIPTION:Micro SD Socket Push-Push Type