



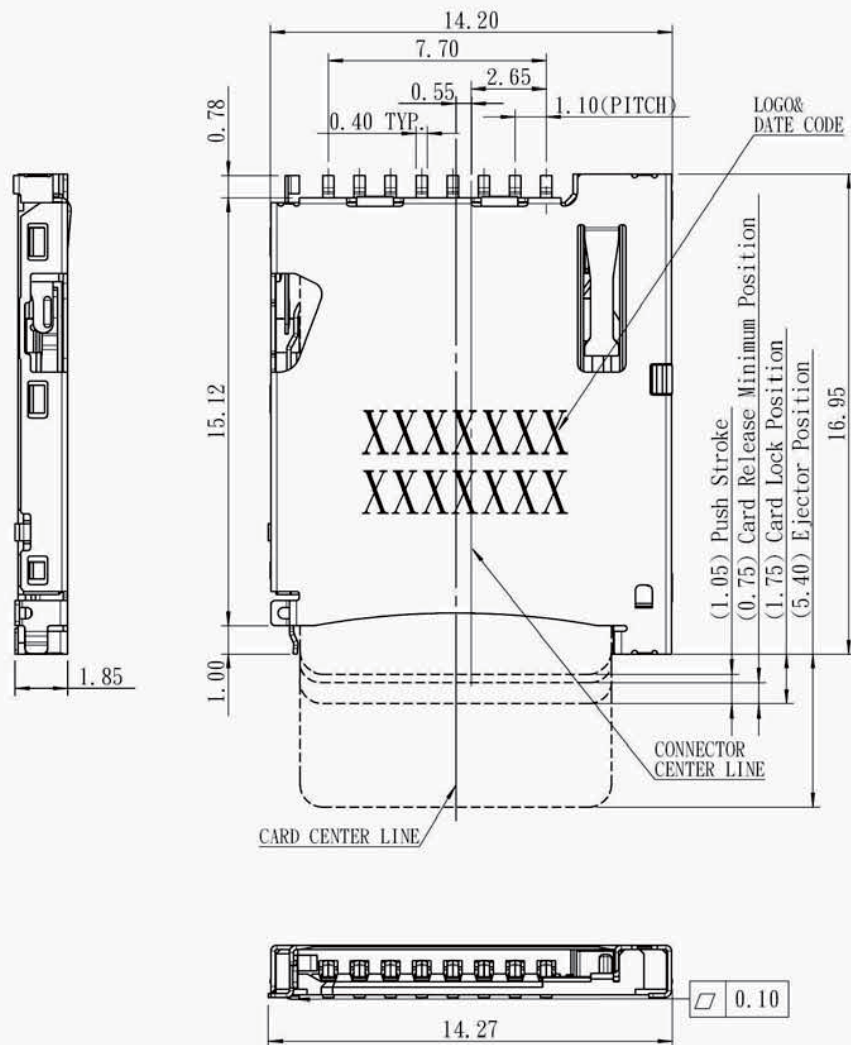


PIN NO.	NAME
#01	DAT2
#02	CD/DAT3
#03	CMD
#04	VDD
#05	CLK
#06	Vss2
#07	DAT0
#08	DAT1
#09	CARD DETECT Switch
#10	CARD DETECT Com.
#11	GND

NOTES :

1. MATERIAL :
 INSULATOR : HIGH TEMPERATURE THERMOPLASTIC
 FLAMMABILITY RATING : UL94V-0 COLOR : BLACK
 CONTACT : COPPER ALLOYS
 COVER : STAINLESS STEEL

2. CONTACT AREA PLATING : GOLD OVER Ni

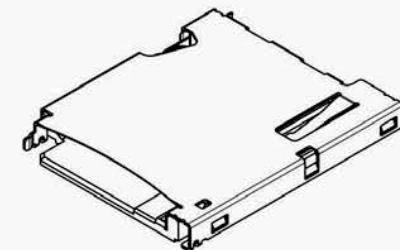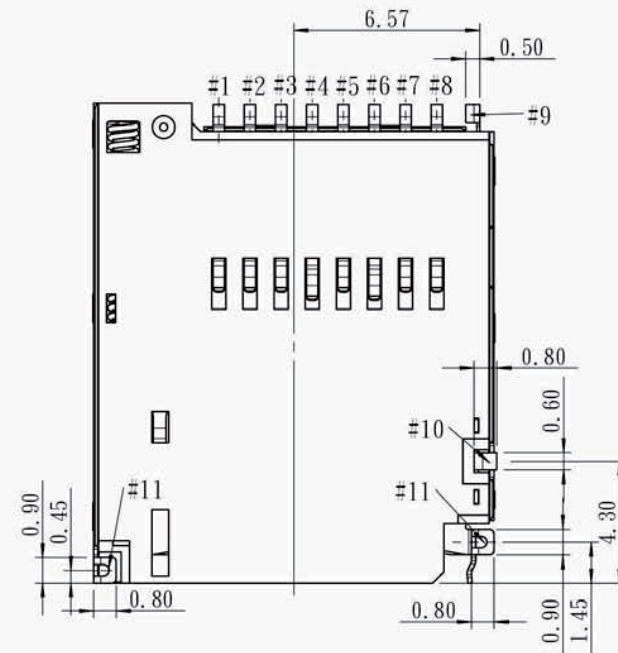

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X, ±


.X ±

.XX ±

.XXX ±

ANG ±



PPOJECTION



ORDER INFORMATION

TFC-WPBE13BR-08-LF
 SERIES REEL B TYPE
 90°SMT PUSH PUSH EAR 13.0mm
 LEADFREE 08WAY
 BOTTOM CONTACT

DESCRIPTION:

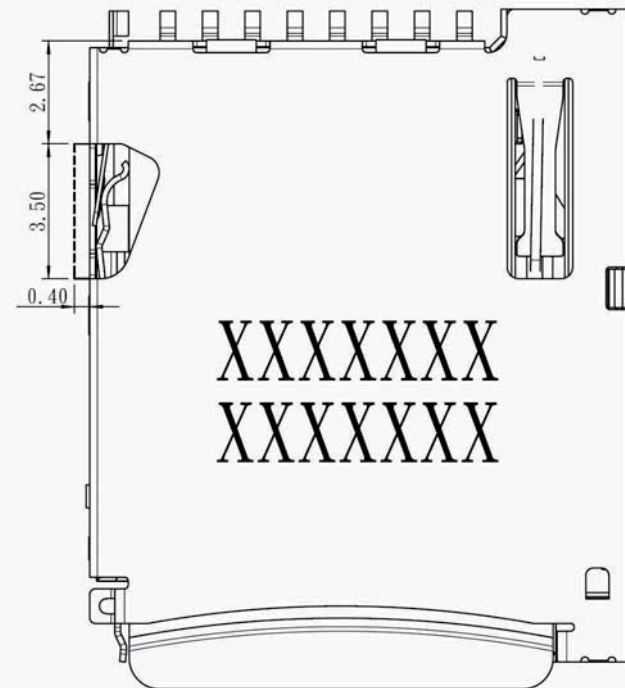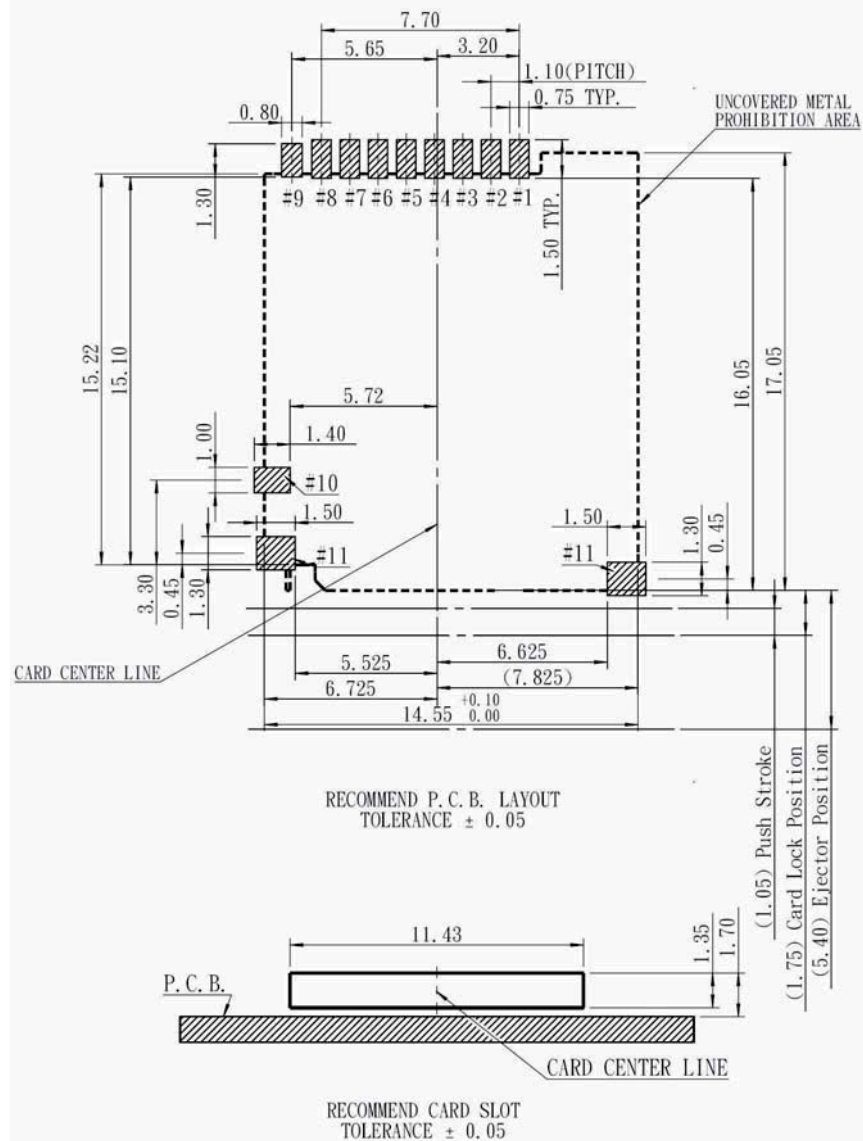

A SIZE WHEN A HOOK PART
OPERATES (MAX. 0.4mm)

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

DATE

SIZE A4

SCALE 1:1

PPOJECTION

TOLERANCES ARE


X. $\pm$

.X $\pm$

.XX $\pm$

.XXX $\pm$



ANG $\pm$



ORDER INFORMATION



TFC-WPBE13BR-08-LF
SERIES T T T T T LEADFREE
90°SMT REEL 08WAY
PUSH PUSH B TYPE
EAR 13.0mm
BOTTOM CONTACT

DESCRIPTION:

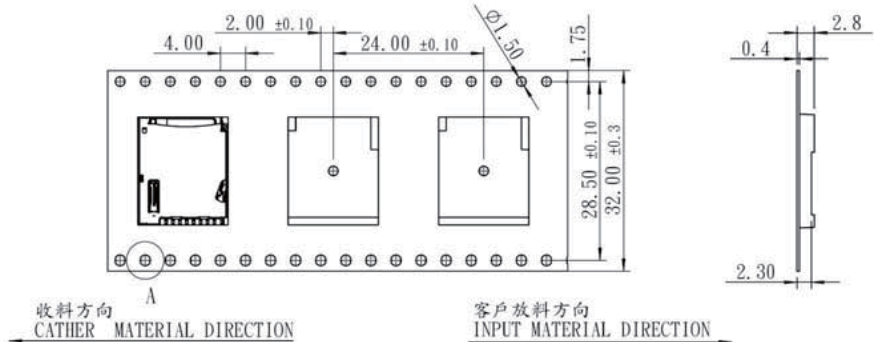

Package. liformation

Patr Number	Q'ty per reel
	750 PCS

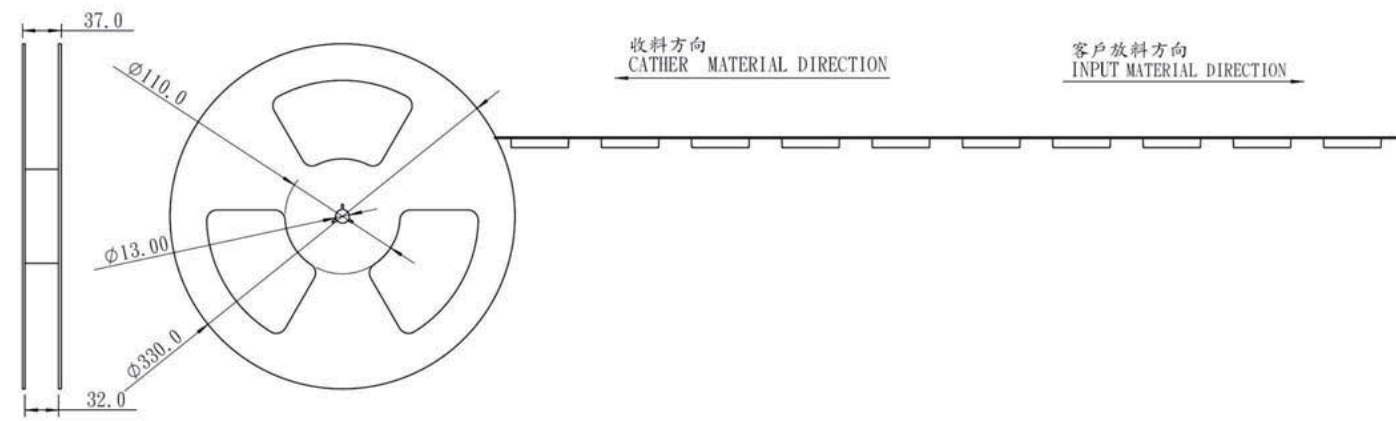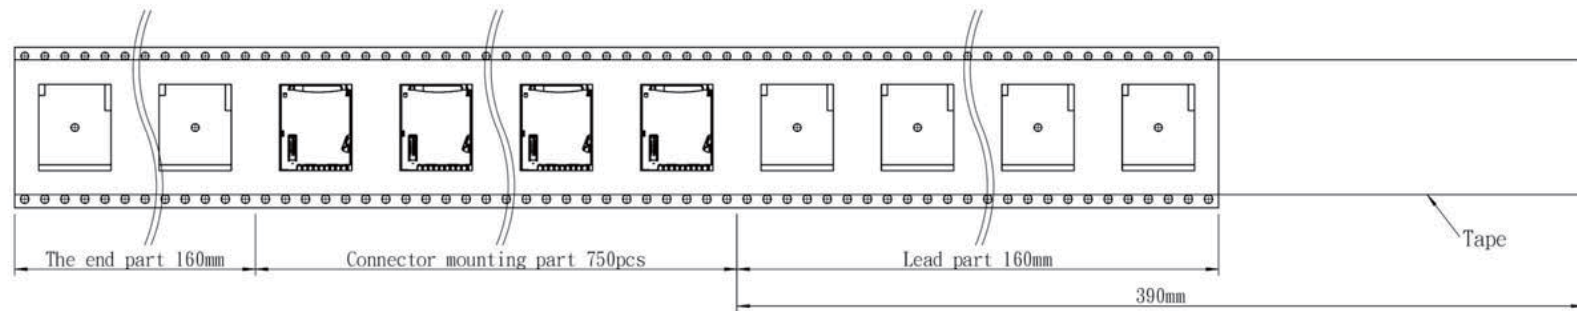

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司


www.morethanall.com

RoHS Compliant

TOLERANCES ARE

DRAWING BY	CY
CHECKED BY	GENIUS
UNIT / mm	SCALE 1 : 1
DATE	
SIZE	A4
PPOJECTION	

X. ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

TFC-WPBE13BR-08-LF

SERIES T T T T T LEADFREE

90°SMT REEL 08WAY

PUSH PUSH B TYPE

EAR 13.0mm

BOTTOM CONTACT

DESCRIPTION: