









TYPE	CONTACT NO.	L
DETECT	36 ,67	3.5
GENERAL	OTHERS	4.25
POWER	1,17,34,35,51,68	5.0

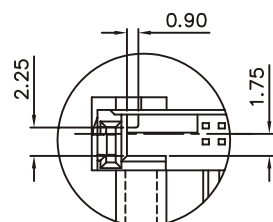

A VIEW
S=2/1
FOR 3.3 V

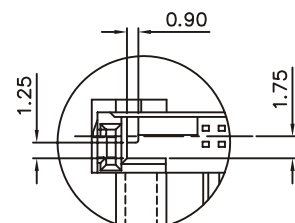

A VIEW
S=2/1
FOR 5.0 V

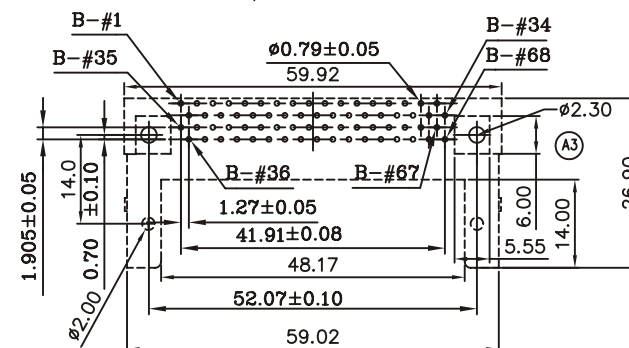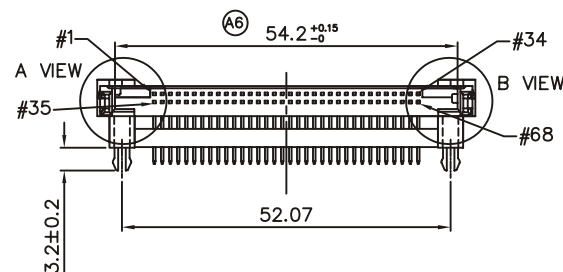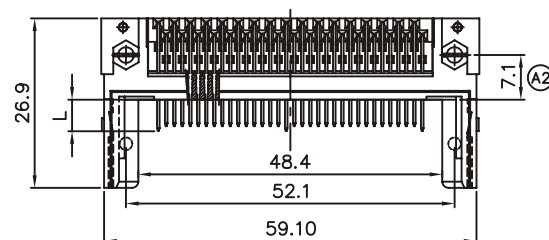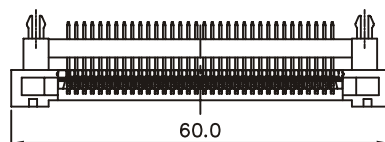

P.C. Board Layout

H	Dimensio
00	0.00mm
20	2.00mm
28	2.80mm
40	4.00mm
50	5.00mm
80	8.00mm
22	2.20mm

Housing: 30% Glass filled LCP UL94V-0.
Contacts: Brass.

Current Rating:0.5 AMP.

Dielectric Withstanding Voltage: AC 1000V For 1 minute.

Insulator Resistance: 1000M Ω min. at DC 500V.

Contact Resistance: 30mΩmax. at DC 100mA.

Operating Temperature: $-55^{\circ}\text{C} \sim +105^{\circ}\text{C}$.

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

 $X. \pm 0.30$

CHECKED BY GENIUS

$$X \pm 0.30$$


UNIT / mm

SCALE 1:1

$$.XXX \pm 0.10$$

DATE

	ANG $\pm 1^\circ$
--	-------------------



ORDER INFORMATION

PCC-PRxxVxZ-68-LF

SERIES LEADFREE

68 WAY
CLIP

MALE	CLIP
	V3:3.3V

DIP 90° | V5:5.0V

00,20,28,40,50,80,22 mm HIGH

DESCRIPTION:

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant