


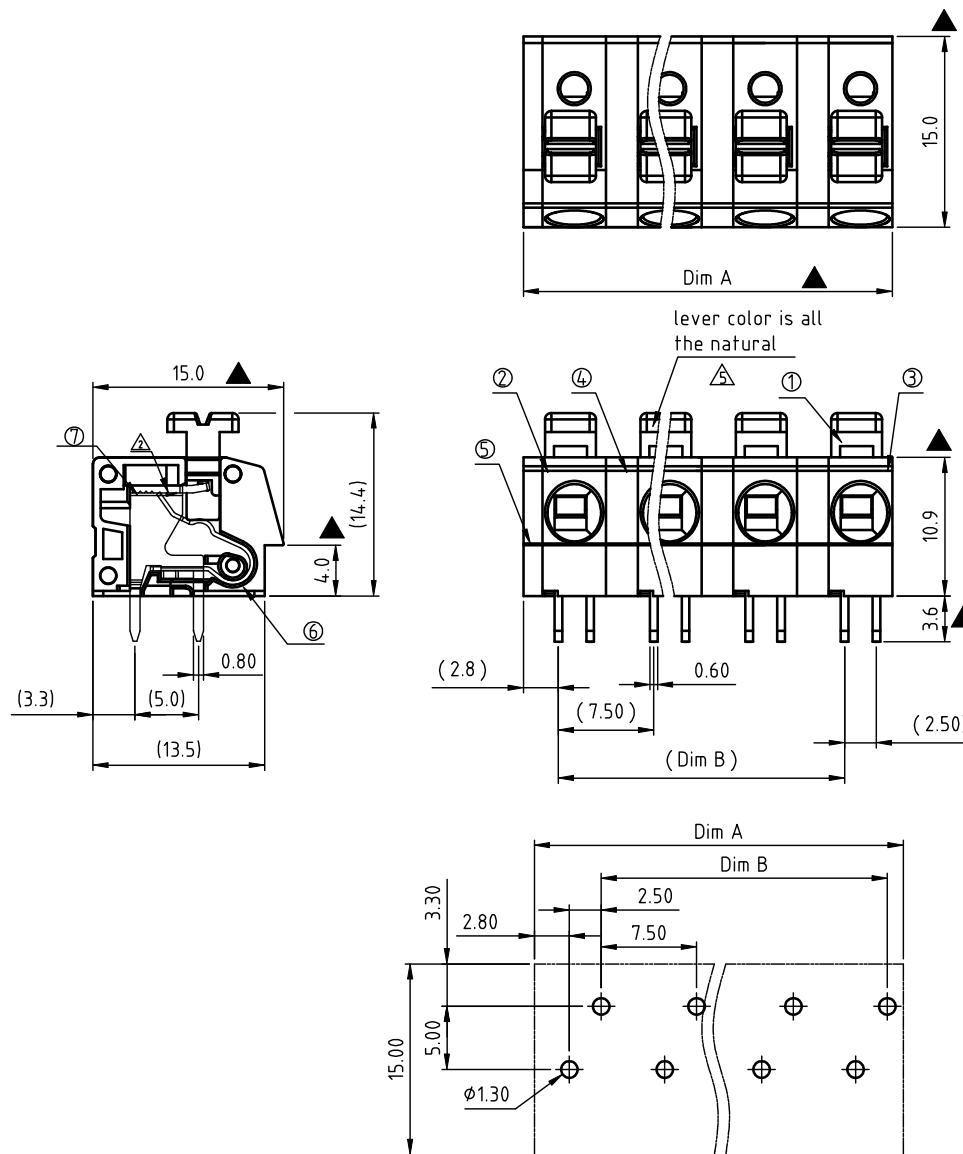

- Material:
- Item ① Lever: Thermoplastic (UL94V-0)
 - Item ② Terminal body: Thermoplastic (UL94V-0)
 - Item ③ Terminal side body: Thermoplastic (UL94V-0)
 - Item ④ Pad board: Thermoplastic (UL94V-0)
 - Item ⑤ cover: Thermoplastic (UL94V-0)
 - Item ⑥ Spring clamp: Stainless steel
 - Item ⑦ contact pin: Brass.Tin plated
- Electrical:
- Voltage rating: 300 V
 - Current rating: 11 A
 - Wire range:
 - Solid wire(AWG): 12-20
 - Stranded wire(AWG): 12-20
 - Wire strip length: 10-11 mm
 - Withstanding Voltage: 1.6KV
 - Operating temperature: -40°C to +115°C
 - Wave Soldering temperature: 260°C ±5°C/5 Sec
 - Safety Approval:
 - Critical dimension:
 - Reference dimension: (x)The dimensions of pitch are just for reference, take the actual assembly result as a judgment when inserting the terminal block into the PCB hole.

N=NUMBER OF POLES

DIM		TOL			
		2P--4P	5P--8P	9P--12P	13P--16P
Dim A	(N-1)×7.5+6.50	±0.15	±0.20	±0.30	±0.40
Dim B	(N-1)×7.5				

PCB Layout
Top view

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

X, ± 0.50
X, ± 0.30
.XX, ± 0.10
.XXX, ±
ANG ± 1°

PPOJECTION



ORDER INFORMATION

TBX075-R14-xx-LF

SERIES

LEADFREE

02~16WAY

HIGH 14.4mm

DIP 90°

DESCRIPTION: