
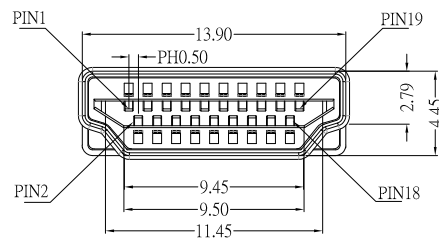
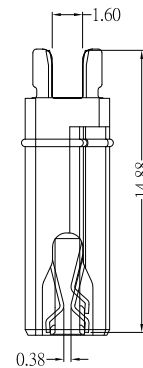




PCB LAYOUT



SPECIFICATIONS :

1. INSERTION FORCE : 44.1N MAX
2. WITHDRAWAL FORCE : 9.8~39.2N
3. DURABILITY : 10,000 cycles
4. CURRENT RATING : 0.5A
5. VOLTAGE RATING : 40V AC MAX
6. DIELECTNIC STRENGTH : 500V AC MIN
7. CONTACT RESISTANCE : 30 mΩ MAX
8. INSULATION RESISTANCE : 100 MΩ MIN
9. OPERATING TEMPERATURE : -25°C ~ +85°C

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°



ORDER INFORMATION

HDMI-PE16-19-LF
SERIES | LEADFREE
19WAY
EDGE CLIP 1.6t
MALE

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: HDMI A TYPE 夾板公頭 板厚:1.6mm