
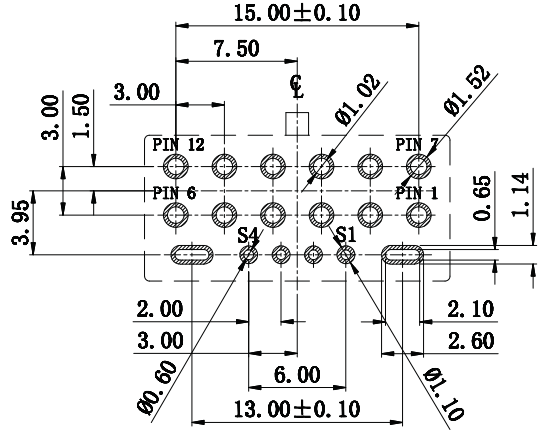


NOTE:
 1.MATERIAL:
 INSULATOR:PA9T/HTN/PBT UL94V-0,BLACK/GRAY/WHITE/GREEN
 PWR & GND PIN:C1100
 SENSE PIN:BRASS
 BOARD LOCK: Phosphor Bronze
 2.FINISH:
 CONTACT: 80u" Min MATTE TIN-PLATED OVERALL, 30u" Min NICKEL UNDER PLATED
 3.ELECTRICAL CHARACTERISTICS:
 CURRENT RATING: 9.2A PER PIN (PWR & GND PIN)
 DIELECTRIC WITHSTANDING VOLTAGE: 1500 VAC 1 MINUTE
 INSULATION RESISTANCE: 1000MΩ MIN.AT 500V/DC
 CONTACT RESISTANCE: 10mΩ MAX
 TEMPERATURE RANGE: -40°C ~ +105°C

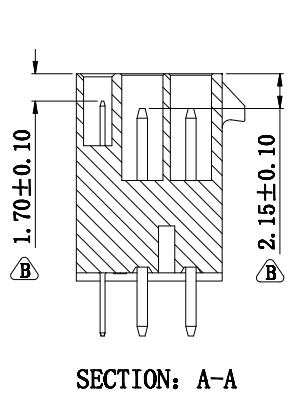

RECOMMEND P. C. B LAYOUT
 TOLERANCE: ±0.05 (TOP VIEW)

PIN SIGNAL	PIN NO.
PWR PIN	1~6
GND PIN	7~12
S1	CARD_PWR_STAB
S2	CARD_CBL PRES
S3	SENSE0
S4	DO NOT USF


RoHS Compliant

TOLERANCES ARE



DRAWING BY CY
 CHECKED BY GENIUS
 UNIT / mm SCALE 1 : 1
 DATE

X. ± 0.30
 .X ± 0.25
 .XX ± 0.20
 .XXX ± 0.05
 ANG ± 1°



ORDER INFORMATION

MIFMU-PDM-1204-LF
 SERIES | LEADFREE
 | 12+4 WAY
 | METAL FOOT
 | DIP 180°
 | MALE

煜倫股份有限公司

www.morethanall.com

SIZE A4 PPROJECTION

DESCRIPTION: