

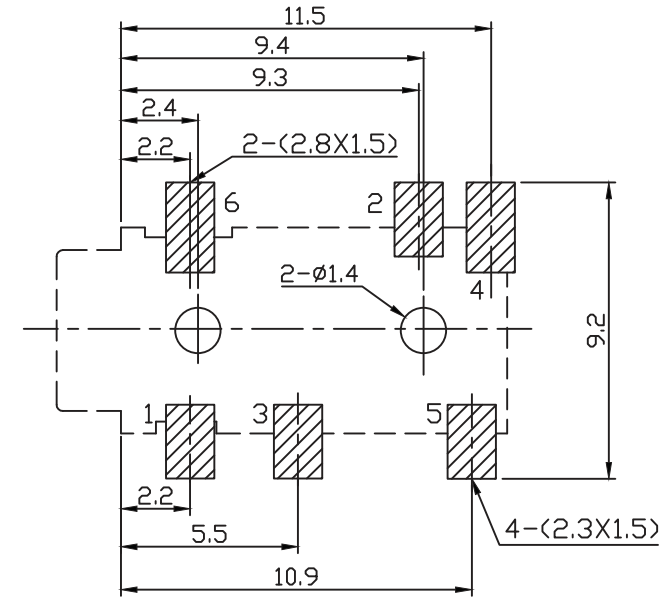
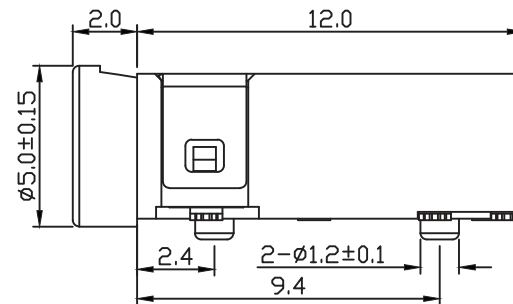
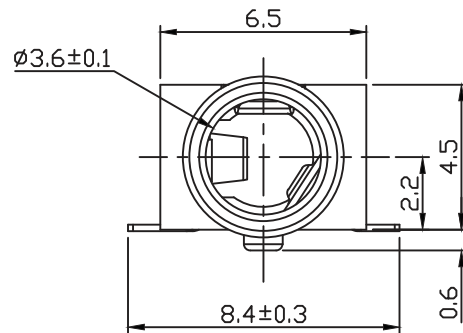
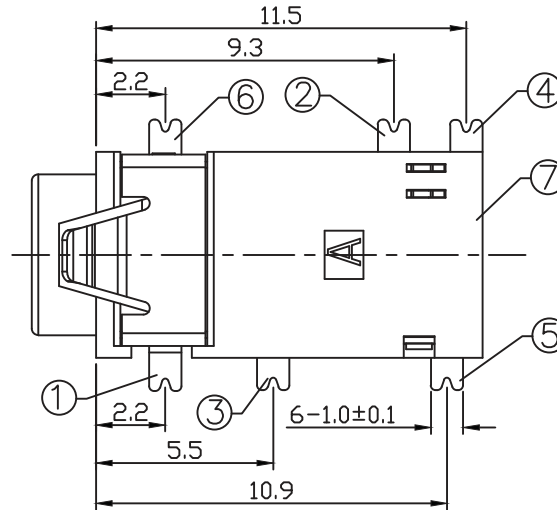


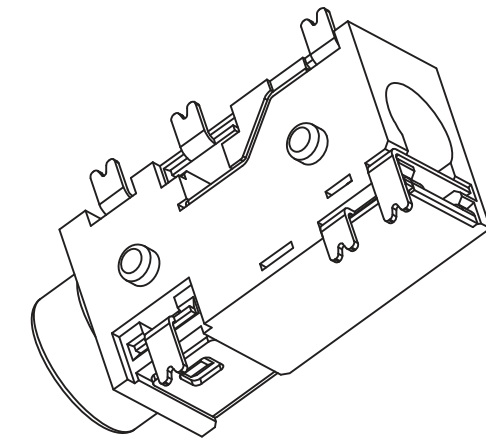

T:1.6 Dimensions of PC board holes
Tolerance : ± 0.05 (Printed-top view)



UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ± 0.2

LTR	PART NAME	QTY	MATERIAL	REMARK
7	HOUSING	1	PA9T	UL-94V0(BLACK)
6	CONTACT FOOT	1	C2680 t=0.20	Ag PLATED
5	CURVE PIECE	1	C5191 t=0.20	Ag PLATED
4	CURVE PIECE	1	C5191 t=0.20	Ag PLATED
3	SPRING FOOT	1	C5191 t=0.20	Ag PLATED
2	SPRING FOOT	1	C5191 t=0.20	Ag PLATED
1	CONTACT FOOT	1	C5191 t=0.20	Ag PLATED

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

PPOJECTION



ORDER INFORMATION

PJ-W27B2R-06D-LF

SERIES REEL 6P4C LEADFREE
BUSHING 2.0mm
POST 2.4+7mm
90°SMT

DESCRIPTION: MINIATURE JACK

1 Space=1 pcs

1 Film packing box=700pcs×1
=700pcs

1 Big Carton=700pcs×13=9100pcs

1 Film packing box Dimension
=L×W×H
=11800×24×5.95

The thickness of the film=0.35mm

1 Embossed Carrier Reel Dimension
=D×H
=330×29.1


1 Cover tape Dimension
=L×W×H
=11800×21.3×0.06

1 Plastic Bag Dimension
=L×W×D
=1000×1100×0.06

1 Big Carto Dimension
=L×W×H
=400×350×340

Unit:mm

Packing temperature request:
105℃~115℃

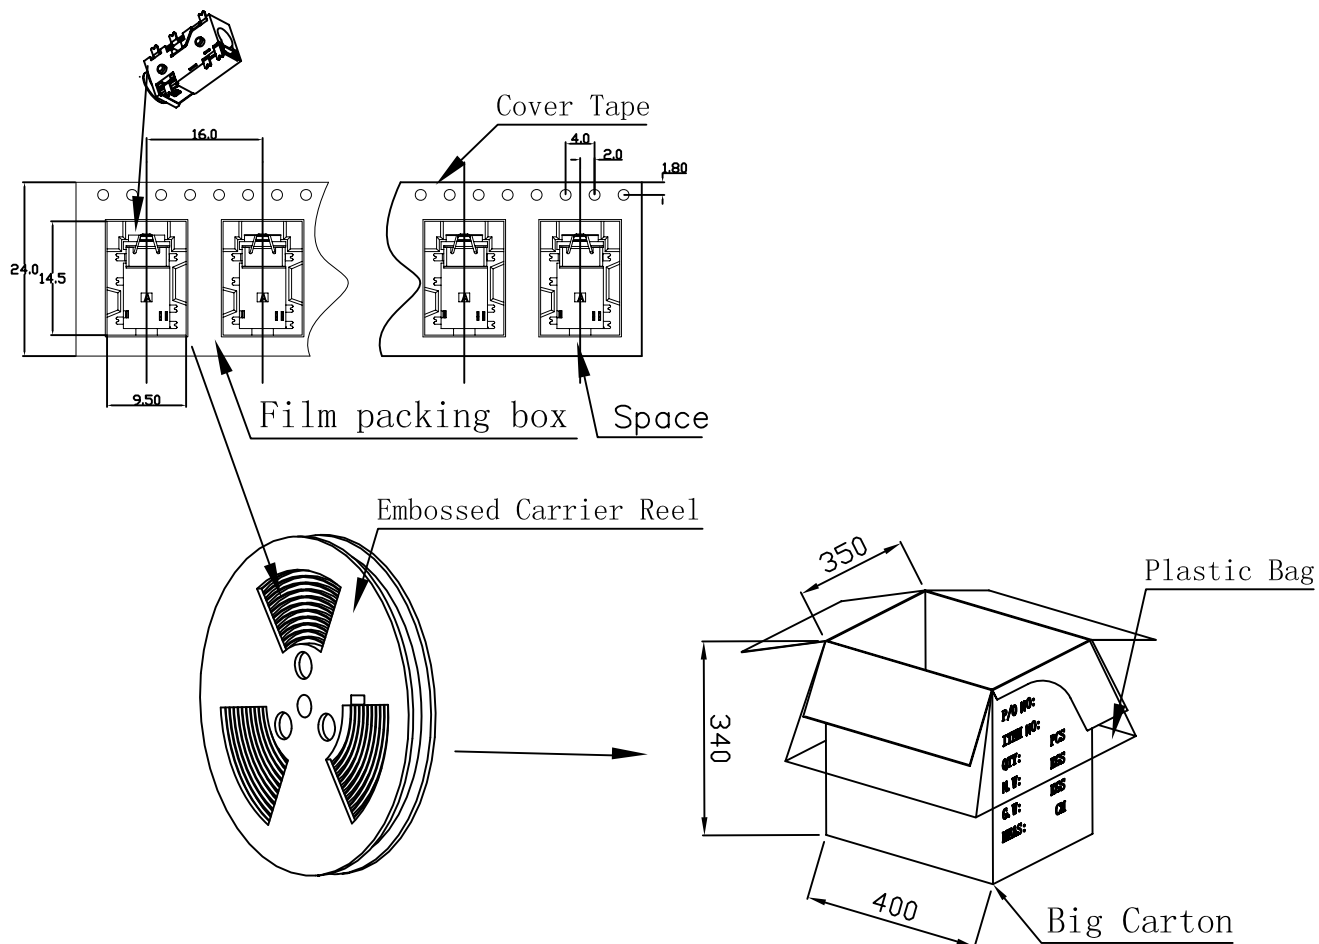

Net weight:4.5Kg

Total weight:10Kg

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

PJ-W27B2R-06D-LF

SERIES

LEADFREE

6P4C

REEL

BUSHING 2.0mm

POST 2.4+7mm

90°SMT

DESCRIPTION: