
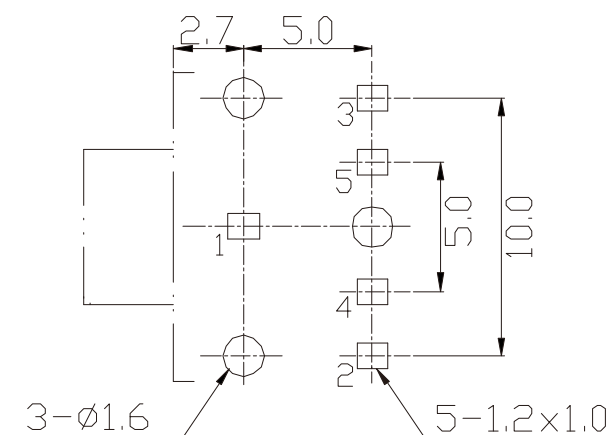



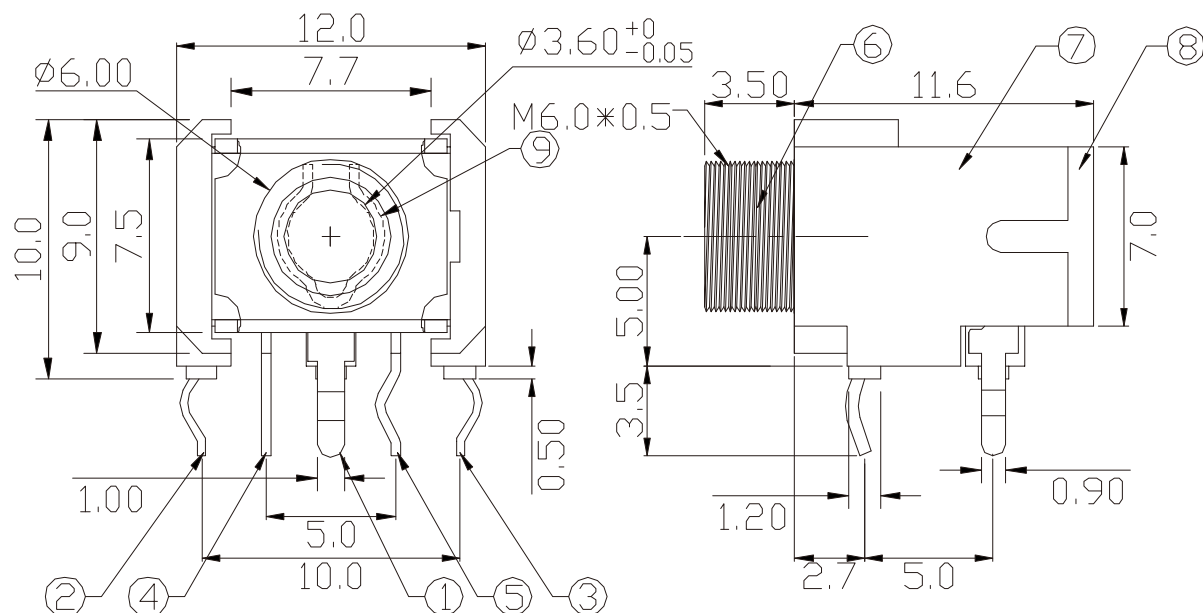

PCB LAYOUT  
(BOTTOM VIEW)

| NO. | NAME         | MATERIAL     | FINISH        | Q'TY |
|-----|--------------|--------------|---------------|------|
| 1   | GROUND TERM. | C.R.S. T:0.5 | TIN PLATED    | 1    |
| 2   | RING SPRING  | PBS T:0.3    | TIN PLATED    | 1    |
| 3   | TIP SPRING   | PBS T:0.3    | TIN PLATED    | 1    |
| 4   | RING BREAK   | BRASS T:0.4  | TIN PLATED    | 1    |
| 5   | TIP BREAK    | BRASS T:0.4  | TIN PLATED    | 1    |
| 6   | BUSHING      | BRASS        | NICKEL PLATED | 1    |
| 7   | HOUSING      | PBT G.F.     | BLACK         | 1    |
| 8   | BACK COVER   | PBT G.F.     | BLACK         | 1    |
| 9   | SPRING WIRE  | BRASS        | SILVER PLATED | 1    |

#### Specification:

Contact Resistance: 30m Ohm. Max AC 100mA Max. 1KHz

Insulation Resistance: 100M Ohm Min. At 500V DC.

Rated Voltage And Current: DC 12V, 2A Max ; AC 100V, 1A Max.

Dielectric Withstanding Voltage: 500V AC For 1 Minute.

#### Durability (Life Test):

A: For Phosphor Bronze 1500 Cycles Minimum.

B: For PBS 2000 Cycles Minimum.

Insertion Force: 0.3~3.0 Kg.

Extraction Force: 0.3~3.0Kg.

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±  
.X ±  
.XX ±  
.XXX ±  
ANG ±



#### ORDER INFORMATION

PJ-R25T-05C-LF  
SERIES | | | | LEADFREE  
5P3C  
THREADED  
2.7+5.0  
DIP 90°

DESCRIPTION: Ø3.5 EARPHONE JACK