
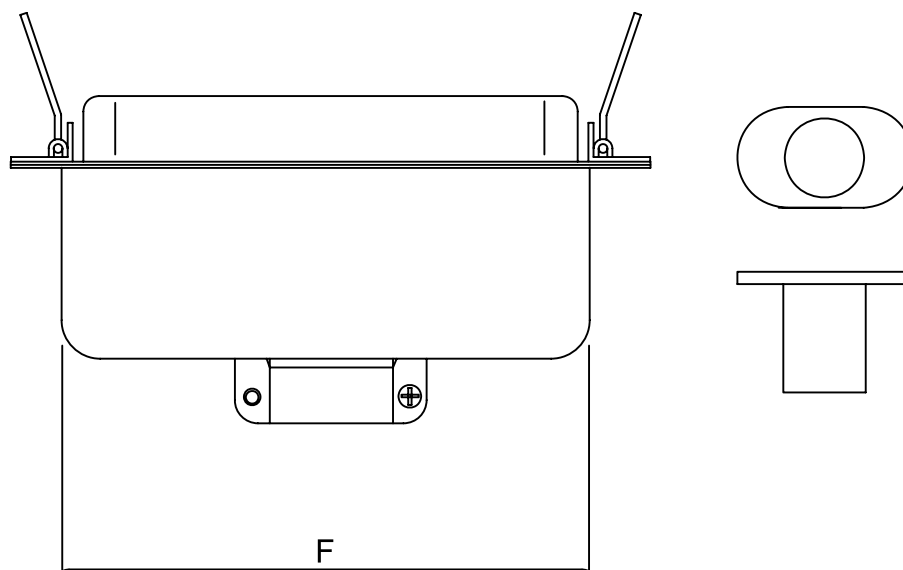


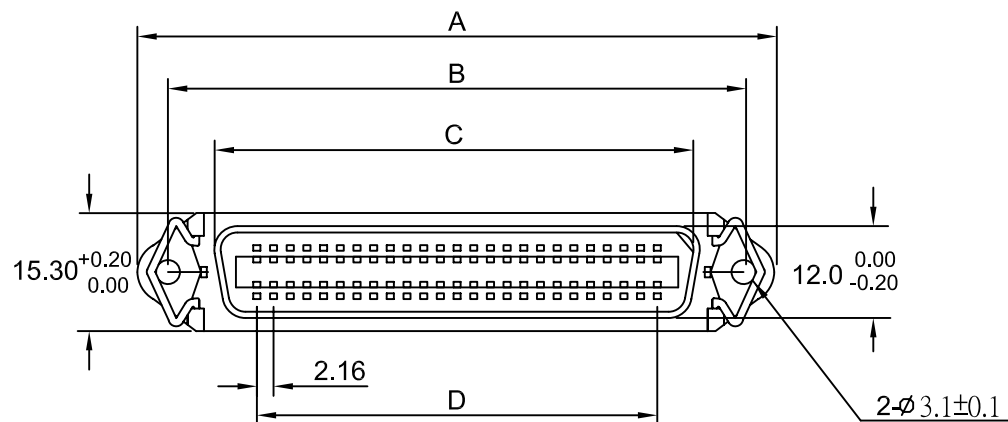

Note:

1.Material:

- 1.1 Insulator: High temperature thermoplastic with g.f,UL94v-0
- 1.2 Contact: Copper alloy,t=0.25mm
- 1.3 Shell: Spcc,t=0.40mm,50P Front-shell t=0.60mm

2.Specification:

- 2.1 Current rating: 1 A Max.
- 2.2 Dielectric withstanding voltage: 750 V(ac) for 1 min.
- 2.3 Contact resistance: 30 mΩ Max.
- 2.4 Insulation resistance: 1000 MΩ Min.
- 2.5 Total mating force: 9.0 Kgf Max.
- 2.6 Total unmating force: 1.0 Kgf Min.
- 2.7 Temperature range: -55°C~85°C

PART NO.	A±0.8	B±0.8	C±0.8	D±0.08	E±0.2	F±0.8
CSH-S-14	43.92	35.99	25.2	12.96		29.0
CSH-S-24	54.71	46.79	36.0	23.76		39.8
CSH-S-36	67.69	59.74	48.9	36.72		53.0
CSH-S-50	82.78	74.85	64.0	51.84		68.1

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION



ORDER INFORMATION

CSH-S-xx-LF
SERIES | LEADFREE
14~50 WAY
FEMALE

DESCRIPTION: CENTRONIC SOLDER FEMALE ASSEMBLY