



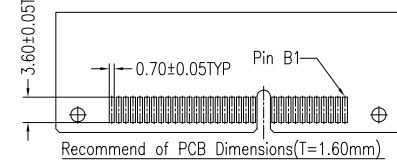
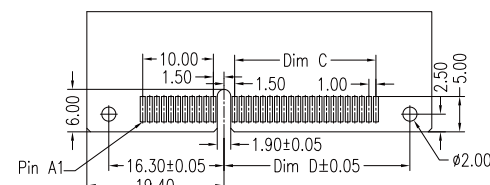


I/O Panel direction
Primary (Component) Side



I/O Panel direction
Secondary (solder) Side

	DIM 'A'	DIM 'B'	DIM 'C'	DIM 'D'	DIM 'E'	Pin'C'
36P	7.65	25.00	6.00	12.30	8.15	A1,B17
64P	21.65	39.00	20.00	26.30	22.15	A1,B17,B31
98P	38.65	56.00	37.00	43.30	39.15	A1,B17,B31,B48
164P	71.65	89.00	70.00	76.30	72.15	A1,B17,B31,B48,B81



NOTES:

*Material

Body : Nylon6T, UL 94V-0 Rated.

Color: Black

Contacts : Brass or Phosphor Bronze

Plating: Gold plating over Nickel on contact Area;

Tin plating on terminal.

*Mechanical

Insertion Force: 1.15N max per contact pair;

Withdrawal Force: 0.15N min per contact pair;

Contact Retention Force: 4.9N min per contact;

*Electrical Specification

Contact Resistance : 30 Milliohms Max.

Current Resistance : 1 Ampere

Insulation Resistance : 1000 Megohms Min, At 500V AC.

*Environmental

Operating Temperature : -55°C to +105°C

RoHS Compliant

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1


DATE

SIZE A4

PPOJECTION

TOLERANCES ARE

X, ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

PCIX-EF2X-xxx-LF
SERIES LEADFREE
036~164WAY
NON FLANGE
EDGE CLIP

DESCRIPTION: PCI Express Connector Strip Form Pin Straddle(With Flange type)