


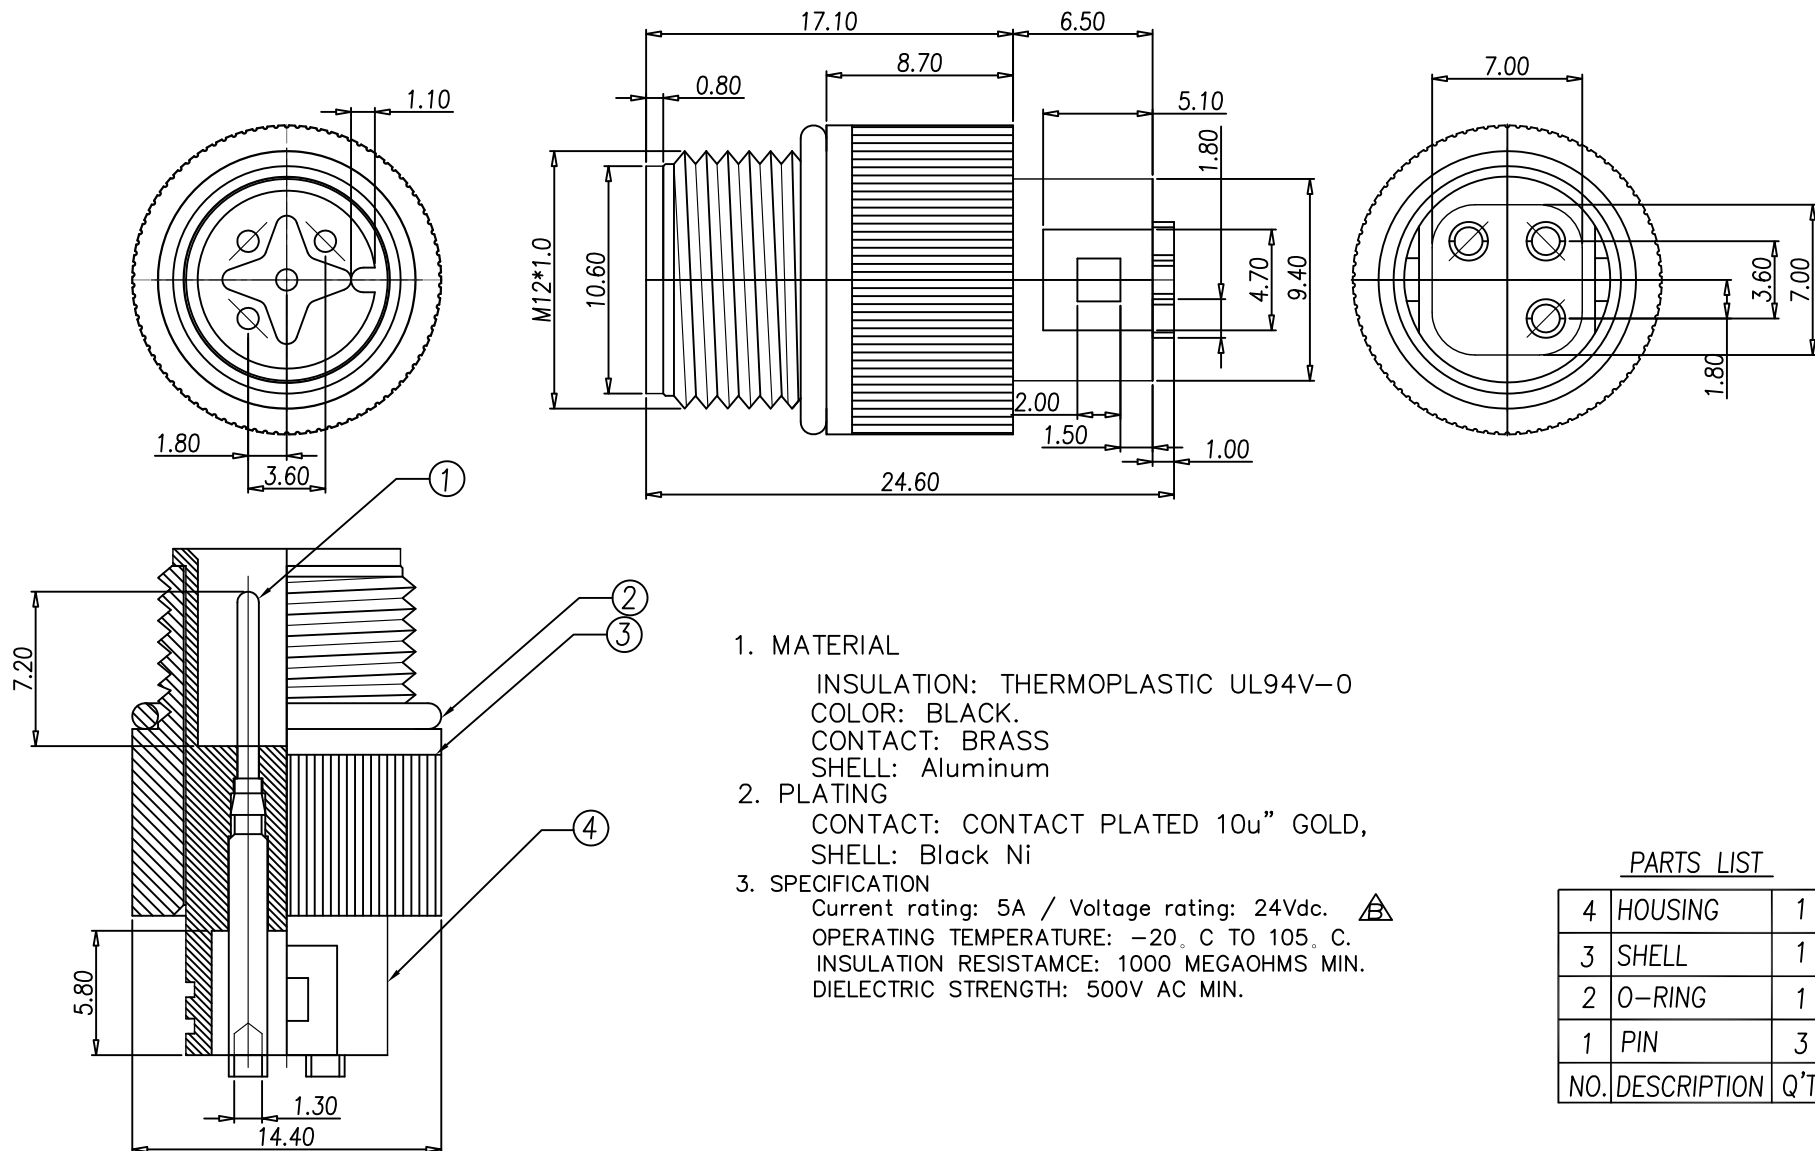

1. MATERIAL

INSULATION: THERMOPLASTIC UL94V-0
 COLOR: BLACK.
 CONTACT: BRASS
 SHELL: Aluminum

2. PLATING

CONTACT: CONTACT PLATED 10u" GOLD,
 SHELL: Black Ni

3. SPECIFICATION

Current rating: 5A / Voltage rating: 24Vdc. Δ
 OPERATING TEMPERATURE: -20°C TO 105°C.
 INSULATION RESISTANCE: 1000 MEGAOHMS MIN.
 DIELECTRIC STRENGTH: 500V AC MIN.

PARTS LIST

4	HOUSING	1
3	SHELL	1
2	O-RING	1
1	PIN	3
NO.	DESCRIPTION	Q'TY

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±

PPOJECTION Φ



ORDER INFORMATION

M12-PSBK-03-LF
 SERIES | | LEADFREE
 | | 03 WAY
 | | BLACK
 | | SOLDER
 | | MALE

DESCRIPTION: M12-3(公)防水頭