

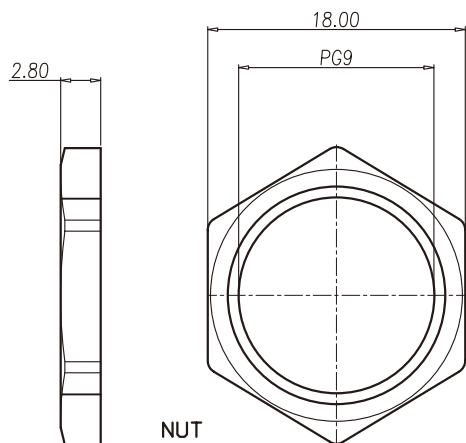
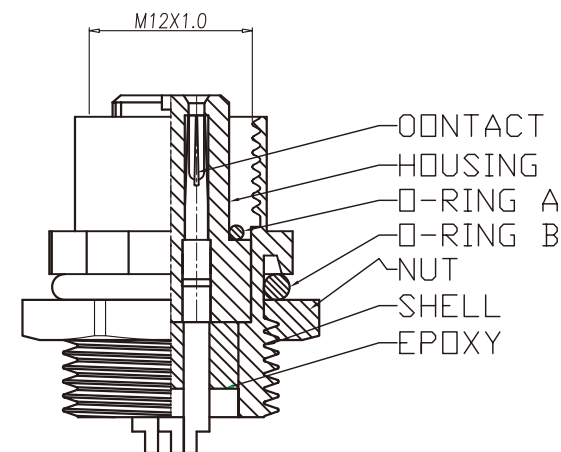
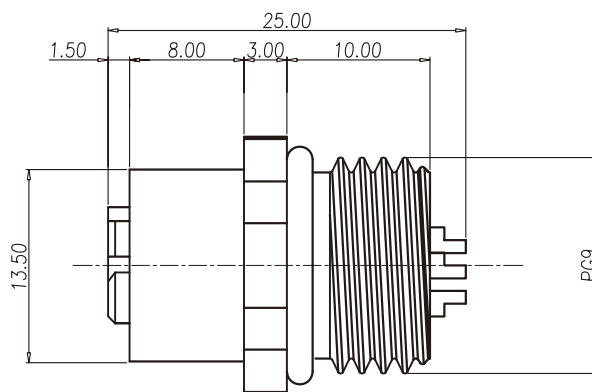


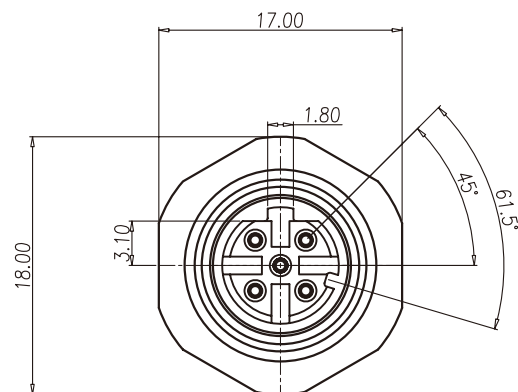

NUT



RECOMMEND PANEL CUT-OUT

1. MATERIAL :
 - 1-1. HOUSING : PBT UL94V-0 ; COLOR : BLACK
 - 1-2. CONTACT : BRASS
 - 1-3. NUT : BRASS
 - 1-4. SHELL : BRASS
 - 1-5. O-RING A : EPDM ; COLOR : BLACK.
 - 1-6. O-RING B : EPDM ; COLOR : BLACK.
2. FINISH :
 - 2-1. CONTACT : 10 MICRO INCHES MIN. GOLD PLATED
UNDER PLATE : NICKEL
 - 2-2. NUT : NICKEL PLATED.
 - 2-3. SHELL : NICKEL PLATED.
3. ELECTRICAL SPECIFICATION :
 - 3-1. Rated current : 5A
 - 3-2. Rated Voltage : 125V
 - 3-3. Water proof: IP68
4. Environmental :
 - 4-1. Operation Temperature : -40℃~85℃

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

DATE

SCALE 1 : 1

SIZE A4

TOLERANCES ARE

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION



ORDER INFORMATION

M12-SSPANO15-05-LF
SERIES | | | | | LEADFREE
FEMALE | | | | | 05WAY
SOLDER | | | | | 15.3 DIA
RING | | | | |
NUT | | | | |
PANEL FRONT

DESCRIPTION: M12 5PIN (F) 5PIN 15.3 DIA