
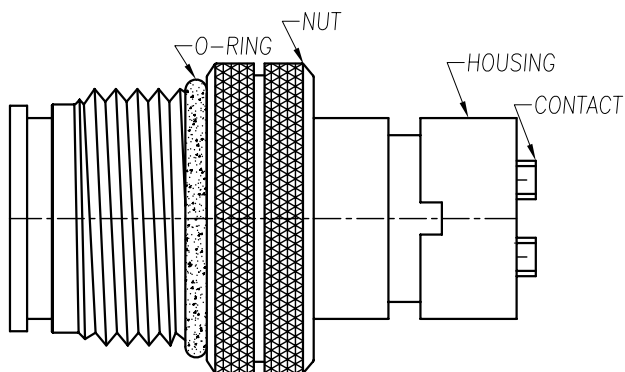
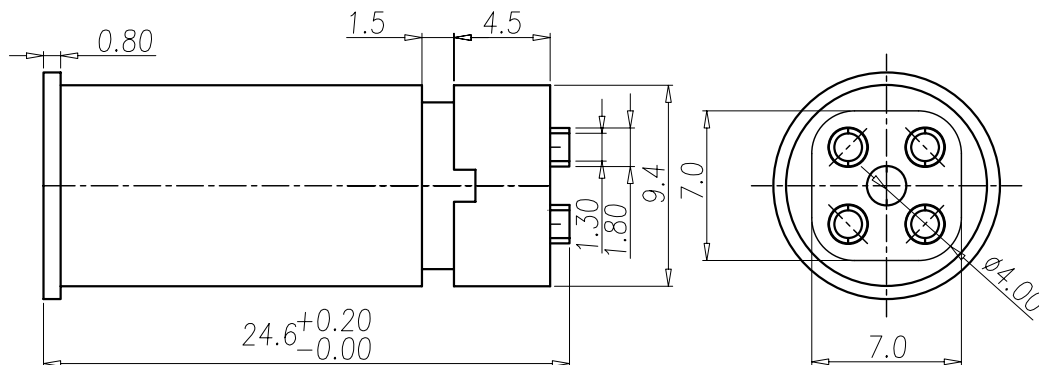
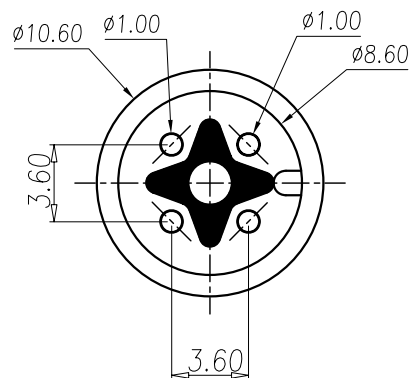


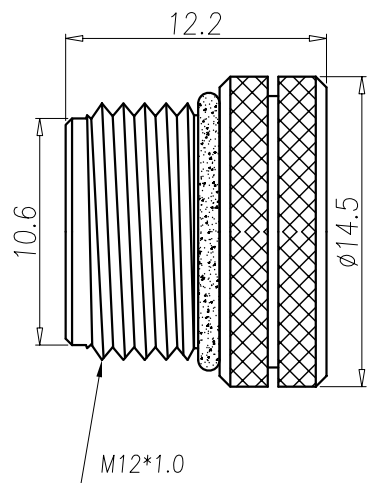

ASSEMBLY

1. MATERIAL :

- 1-1. HOUSING : PBT UL94V-0; COLOR: BLACK
- 1-2. CONTACT : BRASS
- 1-3. NUT : BRASS
- 1-4. O-RING : EPDM; COLOR : BLACK

2. FINISH :

- 2-1. CONTACT A : 10 MICRO INCHES MIN. GOLD PLATED
UNDER PLATE : NICKEL
- 2-2. NUT : NICKEL PLATED 60u" ~ 100u" OVER ALL

3. ELECTRICAL SPECIFICATION :

- 3-1. Rated current : 5A
- 3-2. Voltage : 125V
- 3-3. Water proof: IPX7

4. Environmental :

- 4-1. Operation Temperature : -40 °C ~ 85°C

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION



ORDER INFORMATION

M12-PS-04-LF
SERIES | LEADFREE
04 WAY
SOLDER
MALE

DESCRIPTION: M12-4(M) 線端防水頭