
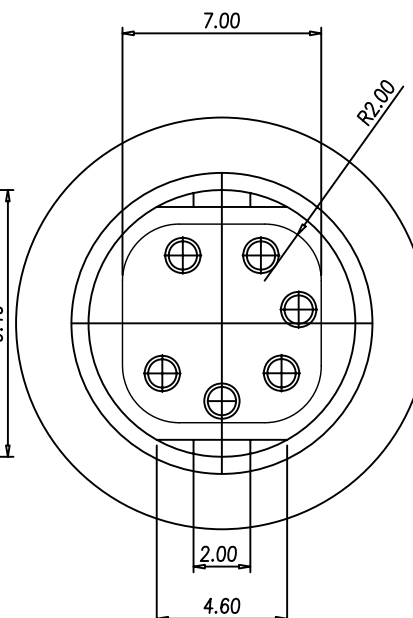
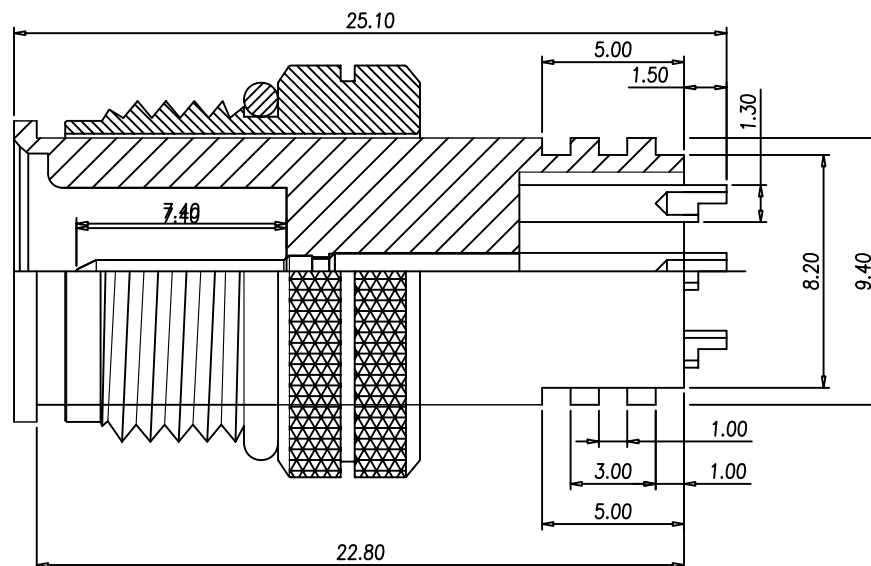


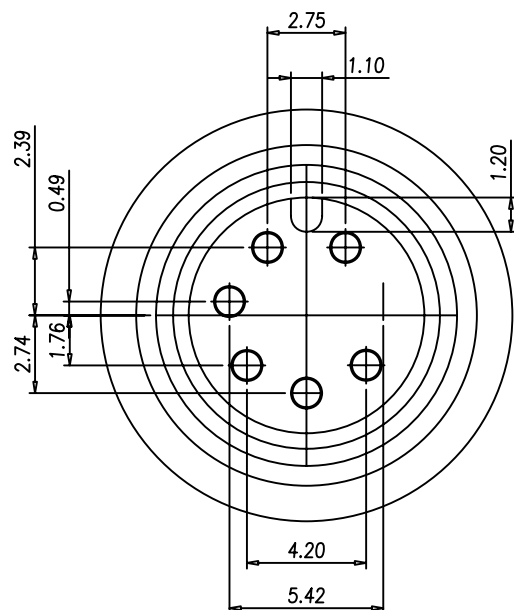

NOTE:

1.MATERIAL:

1-1.INSULATION: THERMOPLASTIC
UL94V-0(PBT 30% GLASS FIBER)

1-2.CONTACT:BRASS

1-3.SHELL:BRASS

1-4.ORING:NBR

2.PLATING

2-1.CONTACT:10u" GOLD,

2-2.Shell:NICKEL 100u"

3. SPECIFICATION

CURRENT: 2 A.

OPERATING TEMPERATURE: -20°C TO 105°C.

INSULATION RESISTANCE: 1000 MEGAΩHMS MIN.

DIELECTRIC STRENGTH: 500V AC MIN.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

M12-PS-06-LF
SERIES | LEADFREE
06 WAY
SOLDER
MALE

DESCRIPTION: 防水頭6PIN(M)線端