
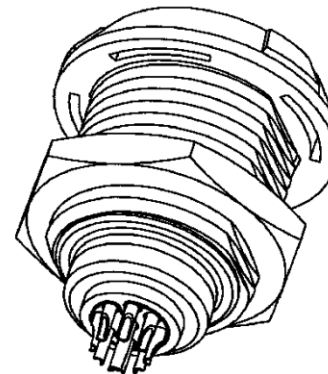
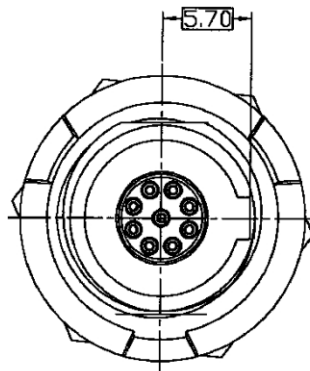
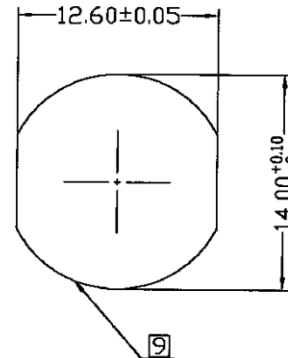


DESCRIPTION

6	RECEPTACLE HOUSING A TYPE
5	RECEPTACLE COVER
4	FRONT NUT
3	HEX NUT
2	CONTACT
1	INSERT
NO.	PART NAME

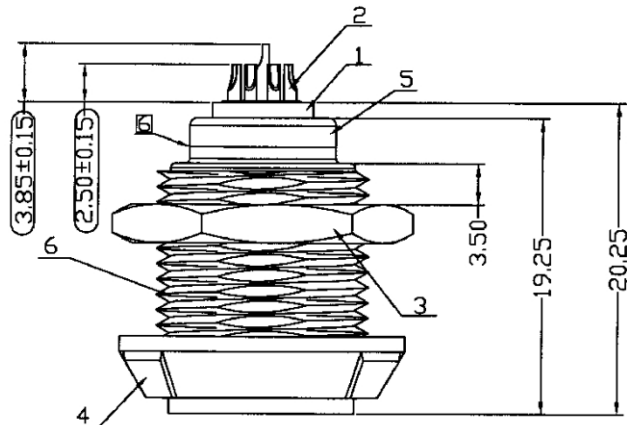

3D 參考圖

備注 : (Remark)

- 材質: 外殼: PSU
(Material: Shell : PSU)
絕緣體: PEEK
(Insert: PEEK)
端子: 磷青銅
(Contacts: Phosphor Bronze)
線夾: PSU
(Cable collect: PSU)
螺帽: PSU
(Back Nut: PSU)
金屬螺母: 黃銅
(Nut: Brass)
- 所有的尺寸都以毫米為單位
(Dimensions in "mm")
- 符合ROHS
(RoHS compliant)
- 以Q做標識的尺寸需經QC制程管制
(QC control item "Q")
- 芯數: 02.04.05.06.07.08.09.10.14
(available pin- 2, 4, 5, 6, 7, 8, 9, 10, 14)
- 超音波焊接處的破壞力最小是10kg
(Ultrasonic welding solder force: 10kg min.)
- 螺母的扭力是1.5Nm
(screw torque: 1.5Nm)
- (與公端成品)插拔力為2kg
(mating/unmating force: 2kg)
- 安裝孔的尺寸
(Recommended Panel Cutout)
- solder temperature: 350±5°C, 2 Seconds

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

PP9-SSPAN-xx-LF
SERIES | LEADFREE
02~14WAY
NUT
PANEL FRONT
SOLDER
FEMALE

DESCRIPTION: