

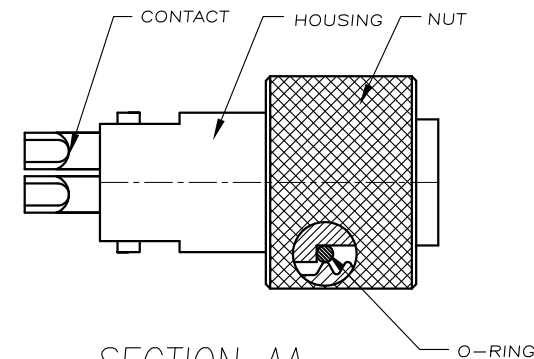


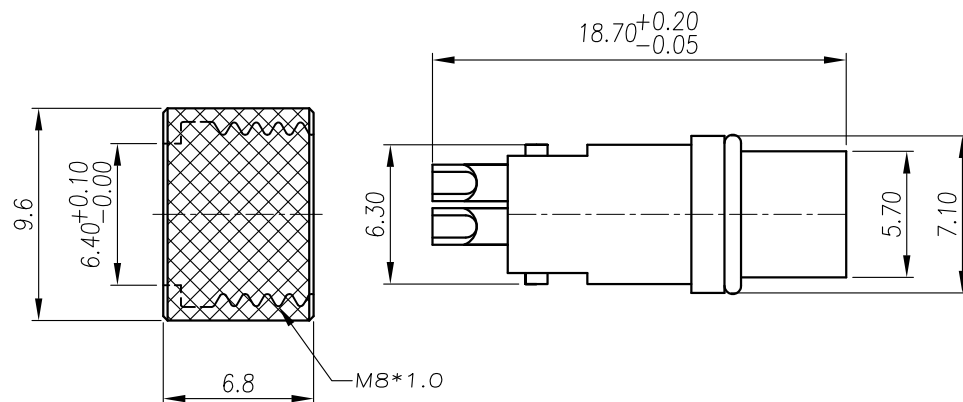

SECTION AA

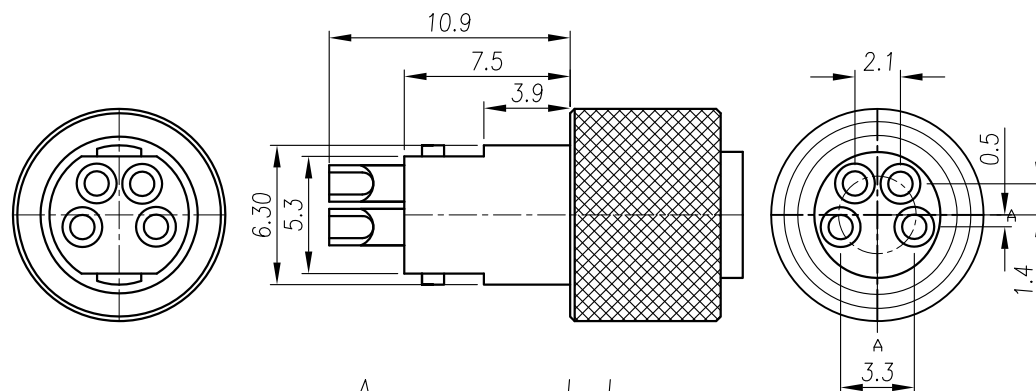

Assembly

NOTE:

1. MATERIAL :

- 1-1. HOUSING : PBT UL94V-0 ; COLOR : BLACK
- 1-2. CONTACT : BRONZE
- 1-3. O-RING : NBR ; COLOR : BLACK
- 1-4. NUT : BRASS

2. FINISH :

2-1. CONTACT :

CONTACT AREA : 10 MICRO INCHES MIN. GOLD PLATING
SOLDER AREA : Gold Flash
UNDER PLATE : NICKEL

2-2. NUT : NICKEL PLATED 60u" ~ 100u" OVER ALL

3. ELECTRICAL SPECIFICATION :

3-1. Rated current : 5A

3-2. Voltage : 125V

3-3. Water proof: IPX7

4. Environmental :

4-1. Operation Temperature : -40 ℃~85℃

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

M8-SS-04-LF
SERIES | LEADFREE
04 WAY
SOLDER
FEMALE

DESCRIPTION: