
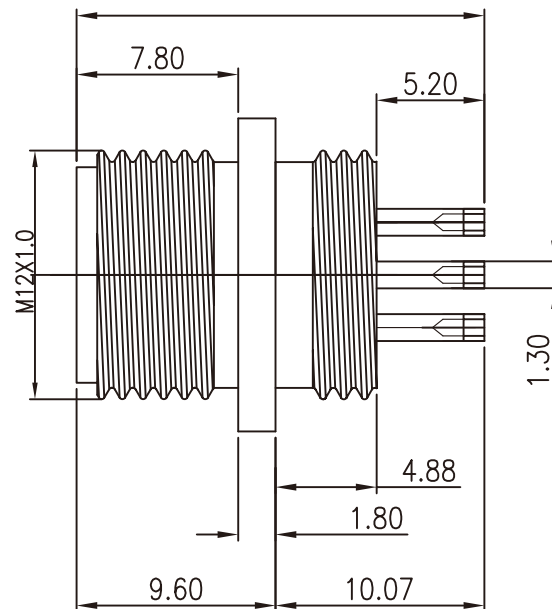
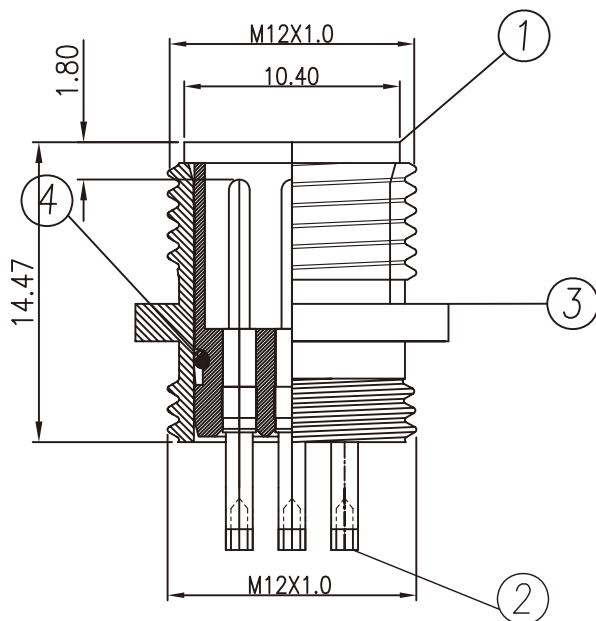


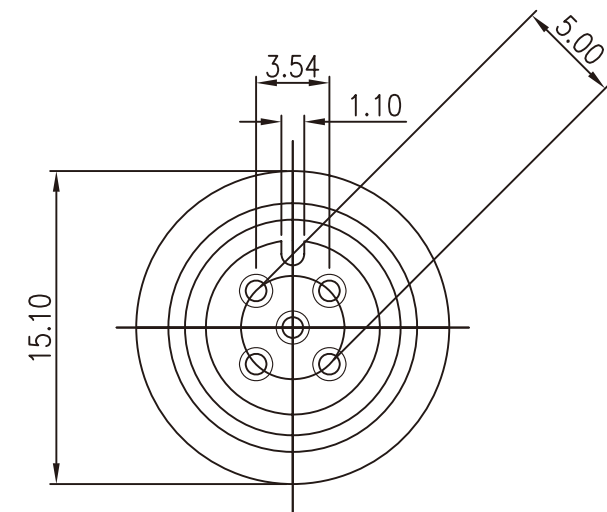

TYPE A

Item	Description	Material	UL File No.
1	Insulation	1403G6	E130155
2	Pin	JIS H3250 C3604 B0	
3	Shell	C3604	
4	O-Ring	NBR	

- MATERIAL
INSULATION: THERMOPLASTIC UL94V-0
COLOR: BLACK.
CONTACT: BRASS
SHELL: BRASS
- PLATING
CONTACT: TYPE B
Shell: NICKEL 100u"
- SPECIFICATION
CURRENT: 2 A.
OPERATING TEMPERATURE: -20° C TO 105° C.
INSULATION RESISTANCE: 1000 MEGAOHMS MIN.
DIELECTRIC STRENGTH: 500V AC MIN.

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1


DATE

SIZE A4

PPOJECTION

TOLERANCES ARE

X. ±
.X ± 0.20
.XX ± 0.10
.XXX ± 0.05
ANG ± 1°



ORDER INFORMATION

M12-PSPA-05-LF

SERIES | LEADFREE
05WAY
PANEL FRONT
SOLDER
MALE

DESCRIPTION: 防水頭 5 PIN(M) 圓形外徑 M12*1.0(半成品)