
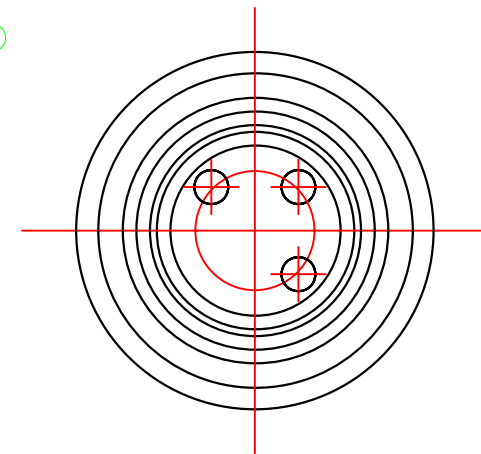
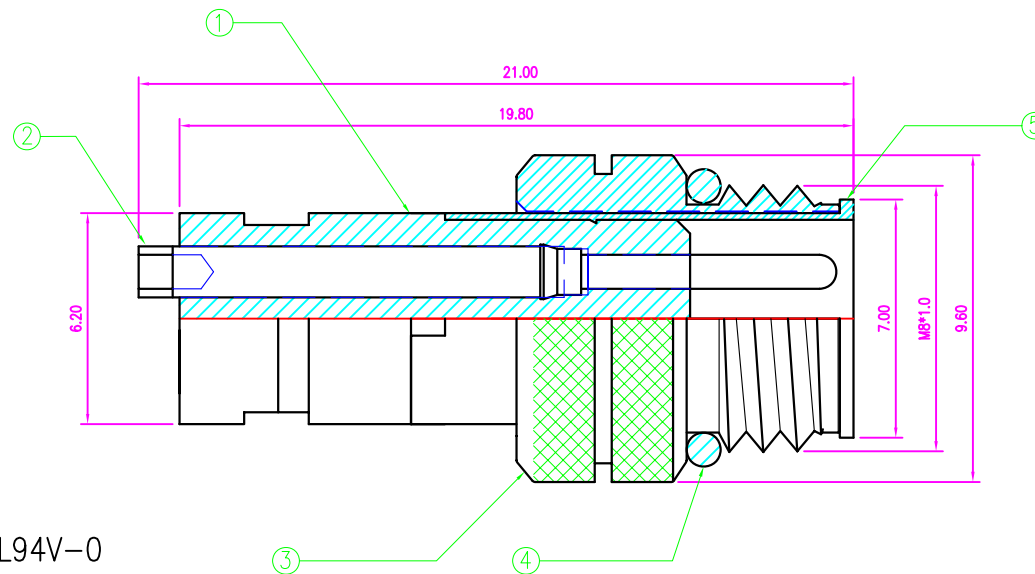


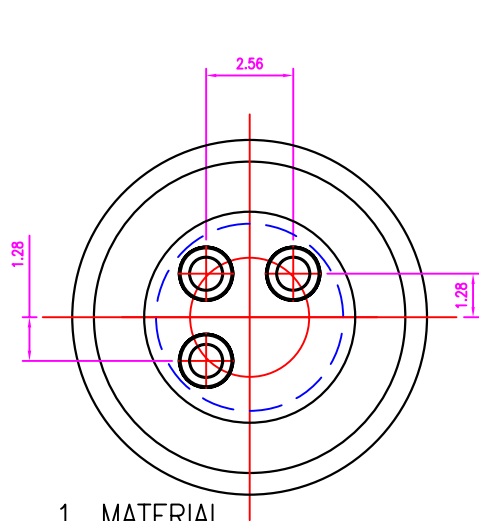

1. MATERIAL
INSULATION: THERMOPLASTIC UL94V-0
COLOR: BLACK.
CONTACT: BRASS
SHELL: BRASS
NUT: BRASS
O-Ring: NBR
2. PLATING
CONTACT: GOLD 10u"
Shell: NICKEL 60u"
3. SPECIFICATION
CURRENT: 2 A.
OPERATING TEMPERATURE: -20° C TO 105° C.
INSULATION RESISTANCE: 1000 MEGAOHMS MIN.
DIELECTRIC STRENGTH: 500V AC MIN.

4. Waterproof test:

Reference to IEC 60529 Edition
2.1:2001-02-IP67

Item	Description	Material	UL File No.
1	Insulation	PBT	E130155
2	Pin	BRASS	
3	NUT	BRASS	
4	O-Ring	NBR	
4	SHELL	BRASS	

BOM	
3	CONTACT
1	SHELL
1	HOUSING
1	O-Ring
1	NUT
數量	零件

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

TOLERANCES ARE

X. ±
.X ± 0.20
.XX ± 0.10
.XXX ±
ANG ±

PPOJECTION



ORDER INFORMATION

M8-PS-03-LF
SERIES | LEADFREE
| 03 WAY
SOLDER
MALE

DESCRIPTION: M8-3(M)Cable External