
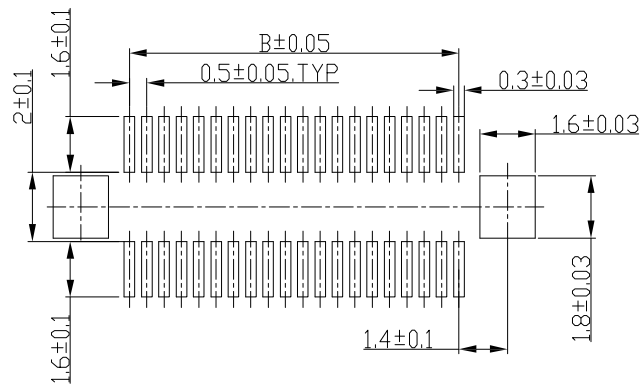

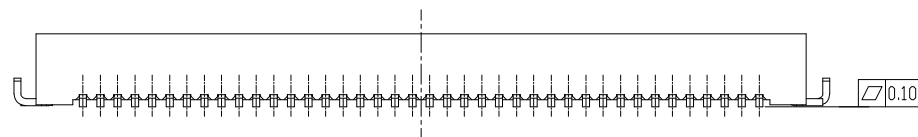


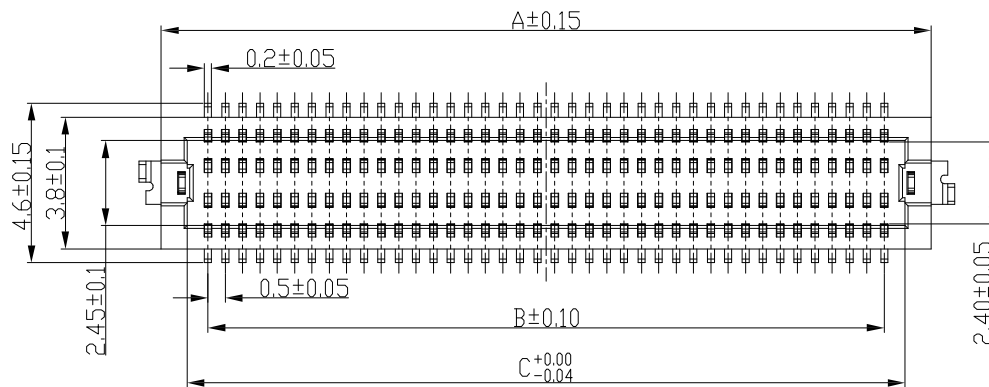

Recommended PCB Layout

NOTES:

1. MATERIAL:

HOUSING: LCP, UL 94-V0, COLOR: BLACK

CONTACT: COPPER ALLOY


LEG: COPPER ALLOY

2. PLATING:

CONTACT: GOLD PLATED ON NICKEL OVERALL

LEG: TIN PLATED ON NICKEL OVERALL

	A	B	C
10 PIN	4.70	2.00	3.20
12 PIN	5.20	2.50	3.70
14 PIN	5.70	3.00	4.20
20 PIN	7.20	4.50	5.70
22 PIN	7.70	5.00	6.20
24 PIN	8.20	5.50	6.70
30 PIN	9.70	7.00	8.20
32 PIN	10.20	7.50	8.70
36 PIN	11.20	8.50	9.70
40 PIN	12.20	9.50	10.70
50 PIN	14.70	12.00	13.20
60 PIN	17.20	14.50	15.70
80 PIN	22.20	19.50	20.70

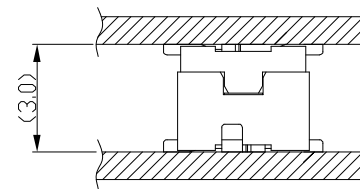

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±


.X ± 0.25

.XX ± 0.20

.XXX ±

ANG ± 3°

PPOJECTION



ORDER INFORMATION

DF12-P23E-xxx-LF

SERIES
LEADFREE
010~080 WAY
EAR
2.3mm HIGH
MALE

DESCRIPTION: 0.5Ph Board to Board SMT Vertical 2.1H