
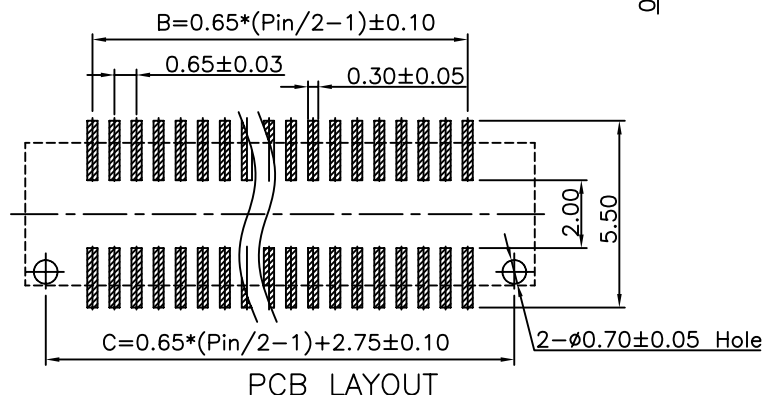

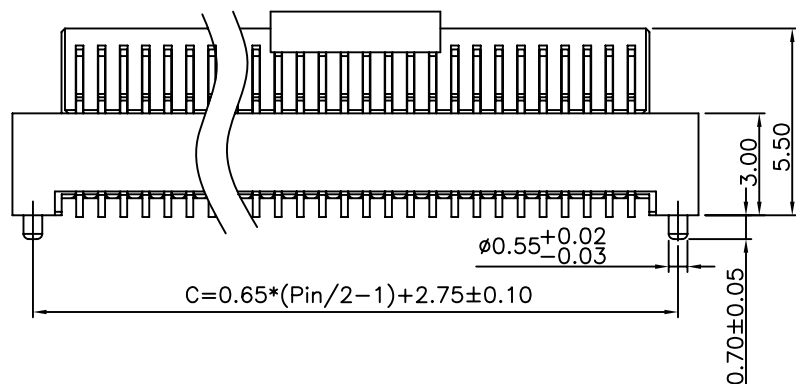
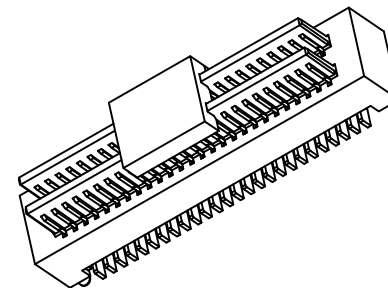



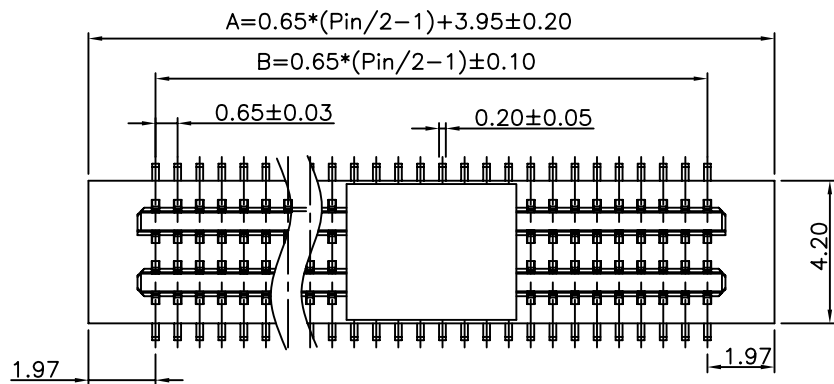

Specifications

1. Current Rating : 0.5A AC/DC
2. Voltage Rating : 60V AC/DC
3. Contact Resistance : 80m ohm. max.
4. Insulation Resistance : 1000M ohm. min.at 100V DC
5. Withstanding Voltage : 150V AC for one minute
6. Operating Temperature Range : -55°C to $+85^{\circ}\text{C}$

Material and Plating

1. Housing : High Temp Plastic UL94V-0
2. Contact : Phosphor Bronze
3. Plating : Gold Plating

**Contact Dimension

Contact	DIM. A	DIM. B	DIM. C
10	6.55	2.60	5.35
20	9.80	5.85	8.60
30	13.05	9.10	11.85
40	16.30	12.35	15.10
50	19.55	15.60	18.35
52	20.20	16.25	19.00

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

$X, \pm$
 $.X \pm$
 $.XX \pm$
 $.XXX \pm$
 $ANG \pm$



ORDER INFORMATION

NP065K-P30PC-xxx-LF

SERIES | | | LEADFREE
 | | | 010-052WAY
 MALE | | POST
 UNMATED HIGH 3.0mm

DESCRIPTION: 0.65mm Board To Board 5.50mm Height Male