


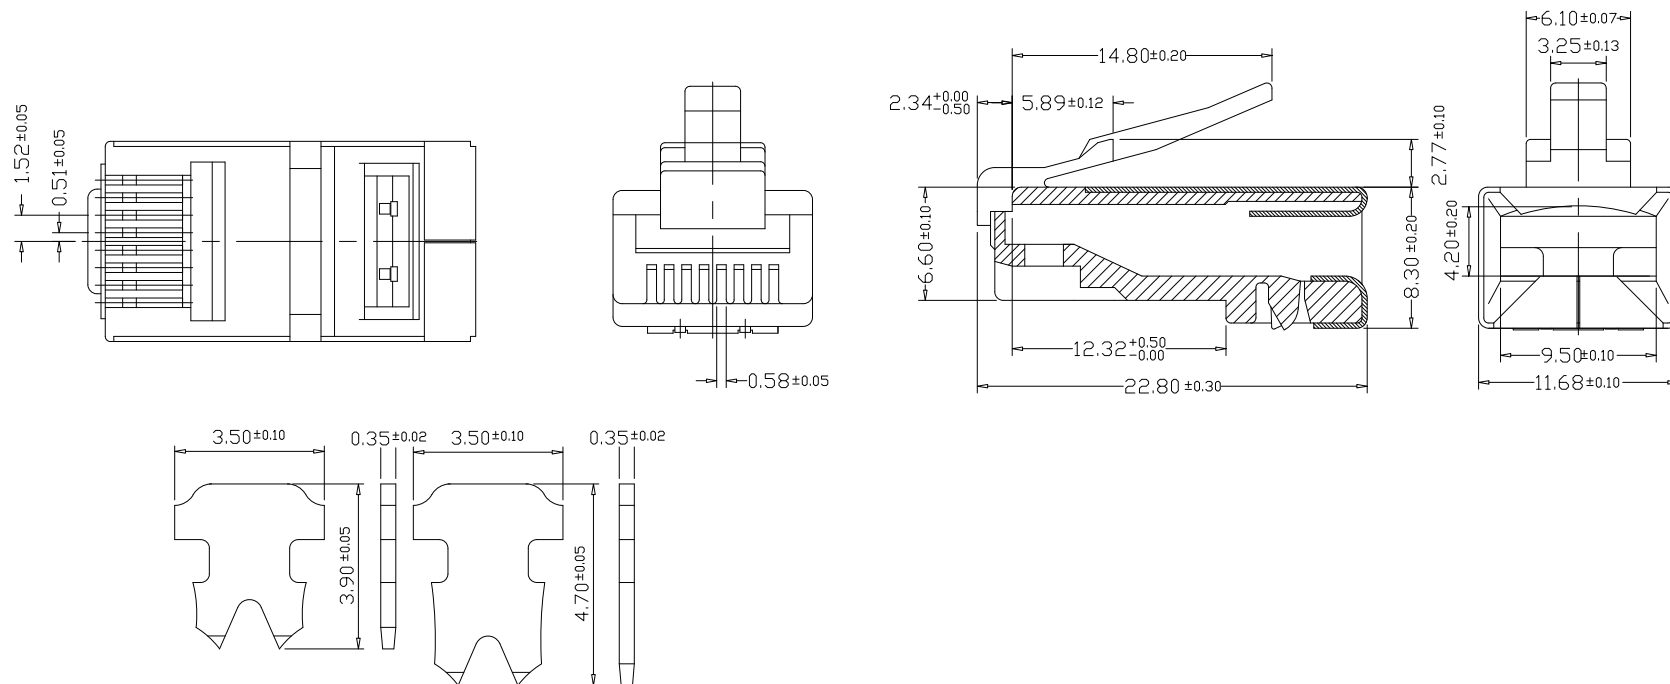

“ ” : 2 PRONGS FOR STRANDED WIRE
多芯線用二叉型金片

材質

1. 塑膠材質 Housing Material : (Polycarbonate(PC) ☐ UL 94V-0 ☐ UL 94V-2)
2. 金片型式 Contact Type : (☐ 二叉型金片 2 prongs for STRANDED wire ☐ 三叉金片 3 prongs for SOLID wire)
3. 鍍金厚度 Gold Plating : (☐ Fμ”(Flash) ☐ 3μ”(≥0.0762μm) ☐ 6μ”(≥0.1524μm) ☐ 15μ”(≥0.381μm) ☐ 30μ”(≥0.762μm) ☐ 50μ”(≥1.27μm))
4. 金片材質 Contact Material : (☐ 青銅 Bronze ☐ 磷青銅 Phosphor Bronze)
5. 銅殼材質 Shield Material : 黃銅合金鍍鎳 Brass with nickel plating
6. 附件選項 Option : (☐ 分線架 Sled ☐ T套 Liner)

Remark:

1. 適用24或 26 AWG 線材。 Available for 24 or 26 AWG wire.

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

TOLERANCES ARE

X. ±

.X ±

.XX ±

.XXX ±




ANG ±



ORDER INFORMATION

MP-RF6-0808-LF
SERIES | 8P8C | LEADFREE
CAT 6
FULL METAL
ROUND OUTLET

DESCRIPTION:

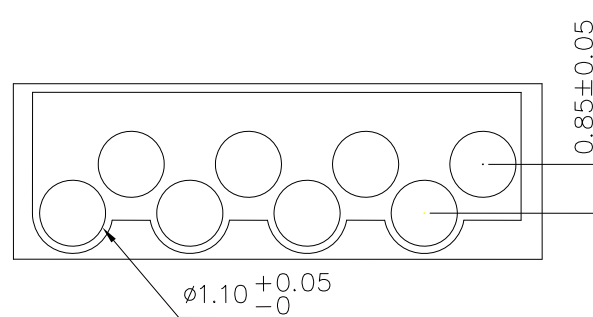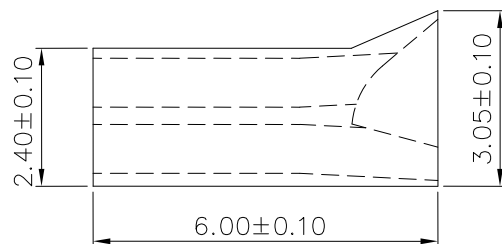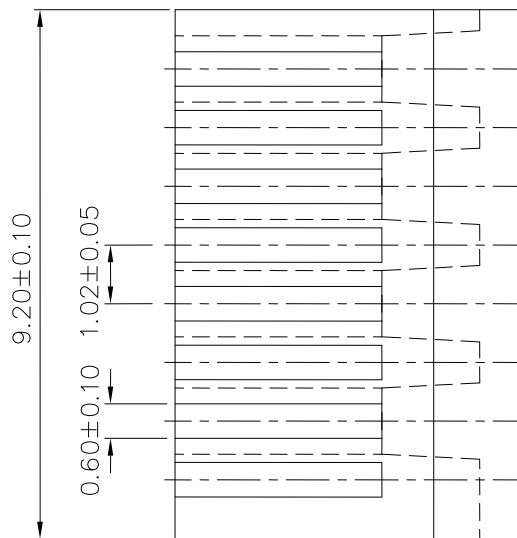

UNIT: m/m

材質 Material :

1. 塑膠材質 Material : (Polycarbonate(PC) ☐UL 94V-0 ☐UL 94V-2)

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION



ORDER INFORMATION

MP-RF6-0808-LF

SERIES

8P8C

LEADFREE

CAT 6

FULL METAL

ROUND OUTLET

DESCRIPTION: