

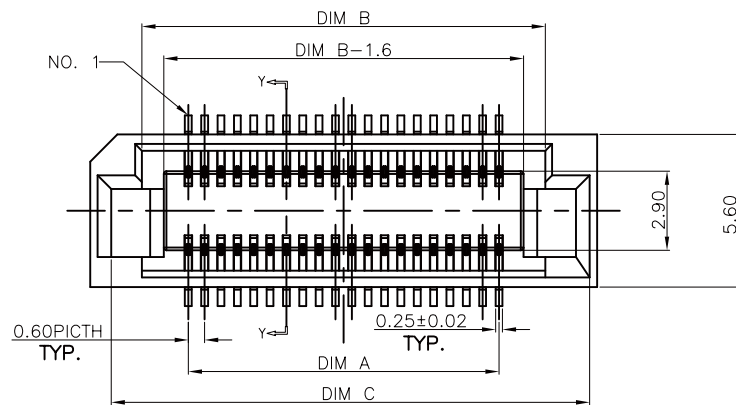



- NOTES:
1. MATERIAL:
 - 1.1 HOUSING: THERMOPLASTIC, HIGH TEMP., UL94V-0; COLOR:NATURAL.
 - 1.2 CONTACT: COPPER ALLOY
 2. FINISH:
 - 2.1 CONTACT: UNDERPLATING: 50u" MIN. NICKEL OVERALL. FINISH:SEE ORDER INFORMATION.
 3. REFLOW SOLDER CAPABLE TO 260°C
 4. COPLANARITY 0.1 MM MAX. BASE ON DATUM A

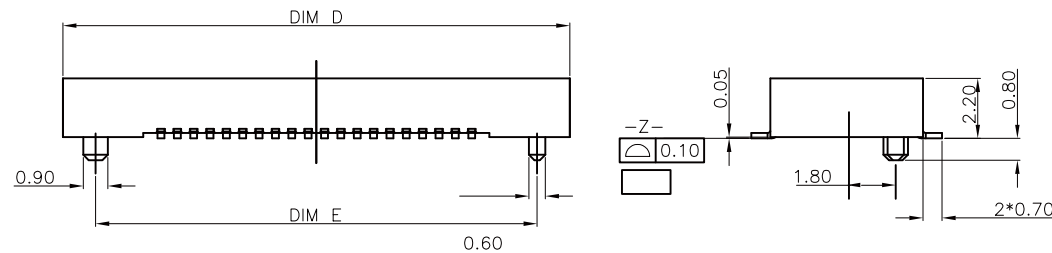

SECTION A-A

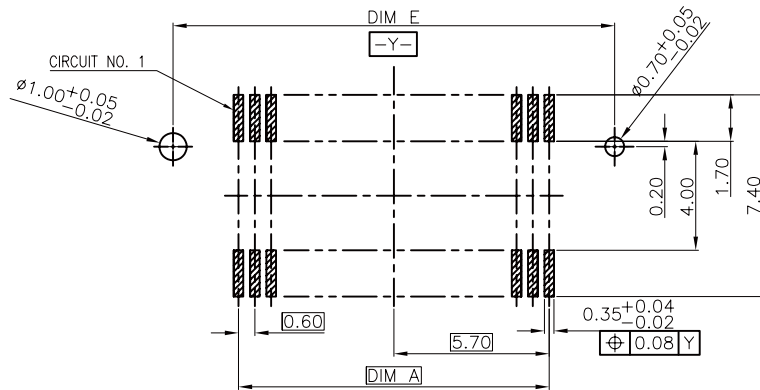

RECOMMENDED PCB LAYOUT
GENERAL TOLERANCE ±0.05

CKT	DimA	DimB	DimC	DimD	DimE
40	11.4	14.8	17.05	18.6	16.2
60	17.4	20.8	23.05	24.6	22.2
80	23.4	26.8	29.05	30.6	28.2
90	26.4	29.8	32.05	33.6	31.2
100	29.4	32.8	35.05	36.6	34.2
120	35.4	38.8	41.05	42.6	40.2
140	41.4	44.8	47.05	48.6	46.2
160	47.4	50.8	53.05	54.6	52.2

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1:1

DATE

SIZE A4

PPOJECTION

X. ±
.X ± 0.20
.XX ± 0.10
.XXX ±
ANG ±



ORDER INFORMATION

FX8-S21P-xxx-LF
SERIES | T | LEADFREE
040~160WAY
POST
UNMATED HIGH 2.1mm
SOCKET

DESCRIPTION: 0.6mm BTB RCPT SMT S/T D/R TYPE