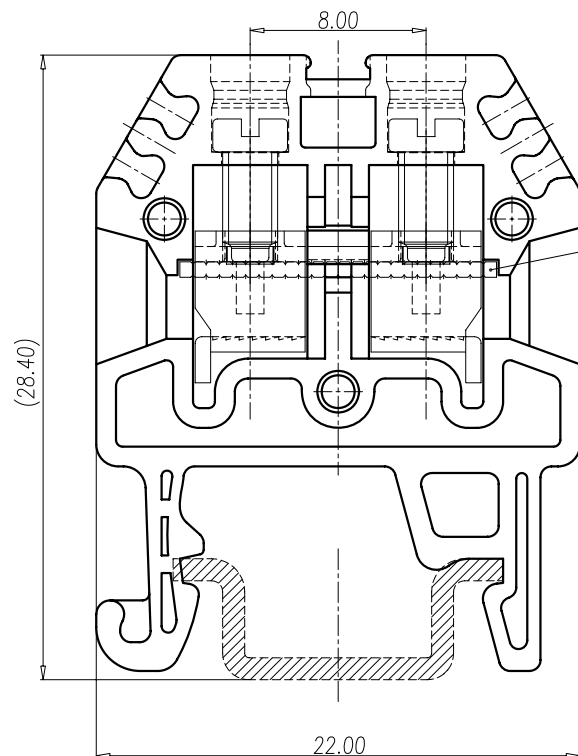
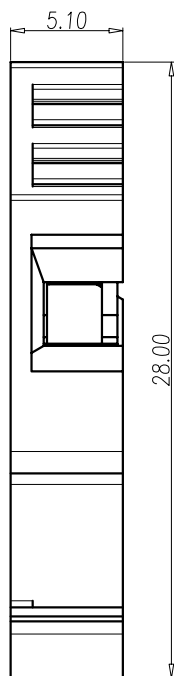



NOTES:

1. Rating: UL 300V 20A
IEC 500V 24A
2. Insulation Withstands Voltage:
AC 2000V at 1 minute
3. Insulation Resistance:
500MΩ or more at DC1000V
4. Using Temperature Range:
-40°C~+105°C
5. Screw Torque Value: 0.4N•m
6. Suitable Electric Wire: UL 22~12AWG
(IEC 0.34~2.5 mm²)
7. RoHS compliance

4	WIRE CAGE	STEEL	M2.5 Zn Plated
3	SCREW	STEEL	M2.5 Zn Plated
2	CONDUCTOR	COPPER-ALLOY	Tin Plated
1	HOUSING	PA66	UL94-V0 GRAY
ITEM	NAME OF PART	MATERIAL	NOTES

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

TBR051-W28-01-LF

SERIES

LEADFREE
01 WAY
HIGH 28.40mm
SCREW WIRE

DESCRIPTION: