


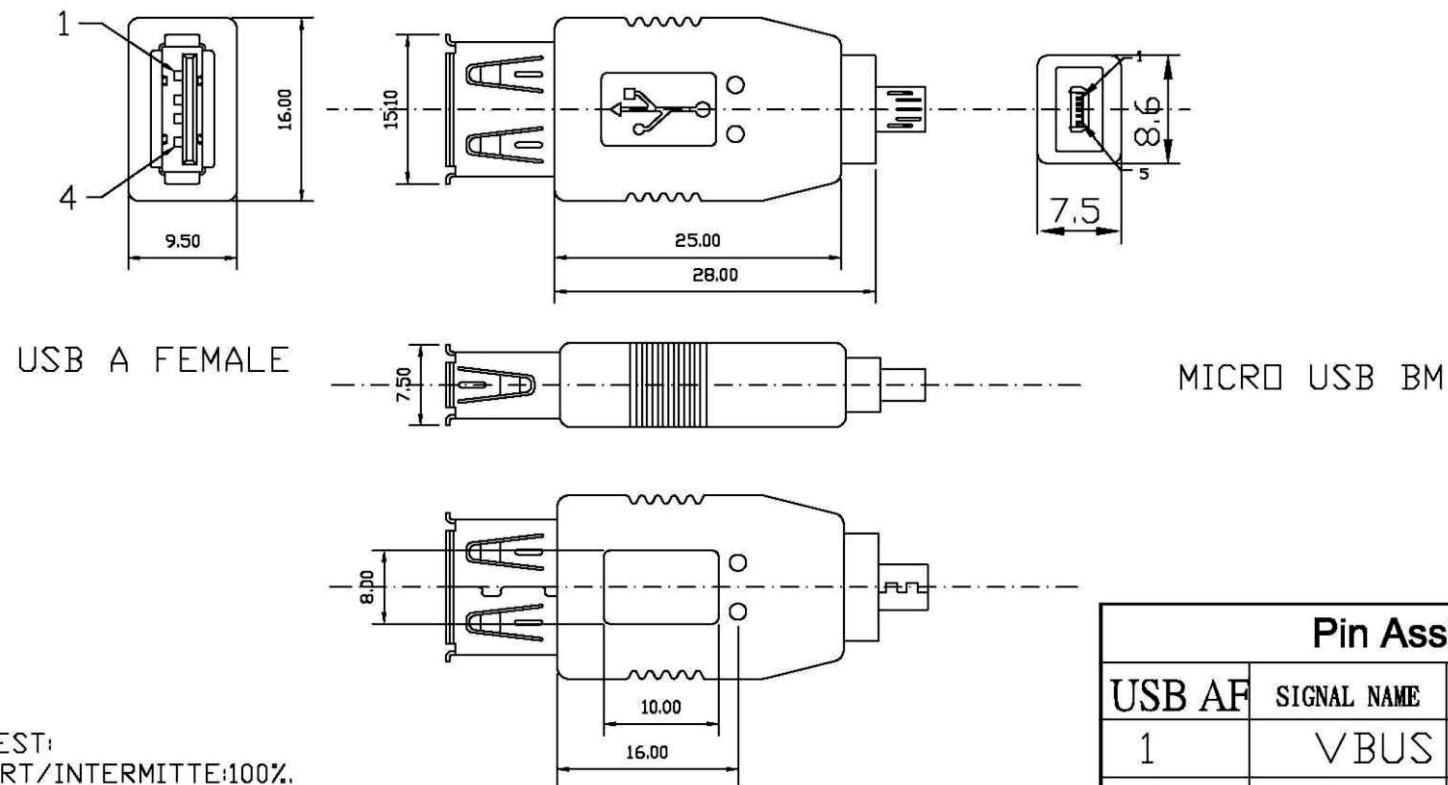

USB A FEMALE

MICRO USB BM

ELECTRONIC TEST:

- 1.OPEN/SHORT/INTERMITTE:100%.
- 2.INSULATION RESISTANCE:10MΩ
- 3.CONTACT RESISTANCE:3Ω
- 4.HI-POT:250V DTAGE.

Pin Assignment

USB A F	SIGNAL NAME	COLOR	MICRO USB B
1	VBUS	RED	1
2	D-	WHITE	2
3	D+	GREEN	3
	ID	<RA_PLUG_ID	4
4	GND	BLACK	5
SHELL	SHIELD	DRIAN	SHELL

4	MICRO USB B TYPE MALE SHELL PLATED NICKEL CONTACT:G/F	PCS	1
3	INTERNAL WIRES: UL1007 30AWG	PCS	5
2	PVC MOLDED COLOR: BLACK		
1	USB-A TYPE FEMALE WHITE PASTERN CONTACT PLATED: GOLD FLASH	PCS	1
NO.	DESCRIPTION	UNIT	QT'Y

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1:1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

MIBUB-EM-5B4A-LF

SERIES

LEADFREE

5PIN B TYPE/4PIN A TYPE

MOLDING

MALE TO FEMALE

DESCRIPTION: