
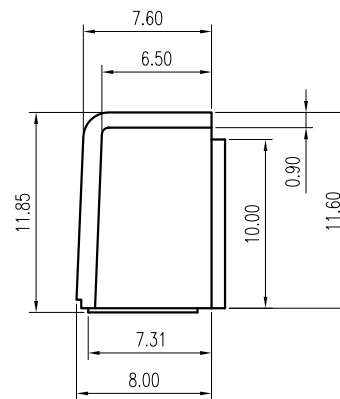
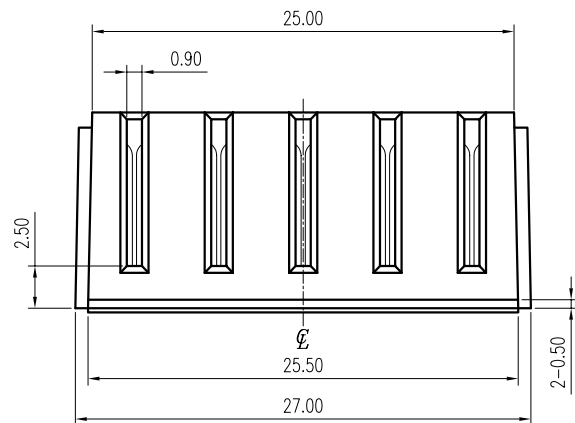
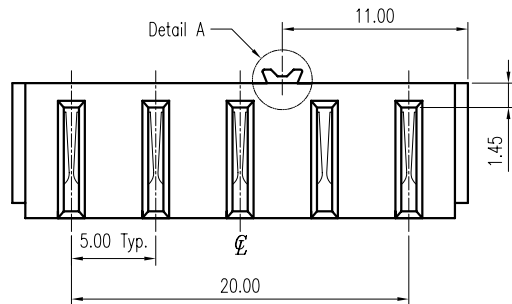


Recommended P.C.B. Layout
Layout Tolerance = ± 0.05 mm

Notes:

1. Material :
Housing : Thermoplastic UL 94V-0, Black
Terminal : Copper Alloy
2. Finish :
Terminal : Selected 15u" Min. Ni Overall
or 5u" Min. Gold Overall



Detail "A"
Scale 5:1

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$



ORDER INFORMATION

BCC50-SV118X-05-LF

SERIES

LEADFREE
05 WAY
NON POST
HIGH 11.85mm
180°SMT
FEMALE

DESCRIPTION: 5.0mm Pitch Battery Conn. Female Type