
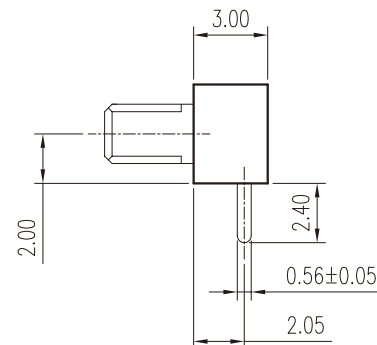



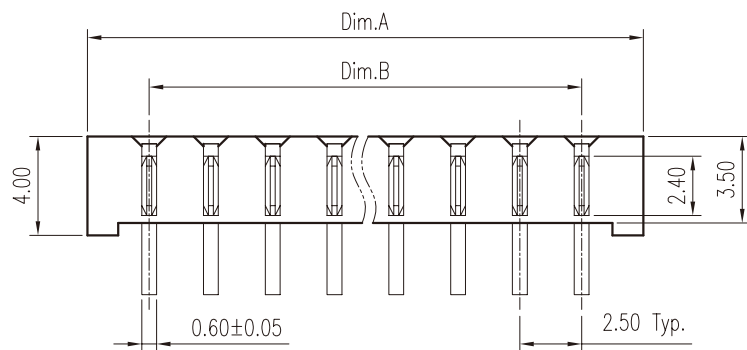


Notes:

1. Material :
Housing : Thermoplastic UL 94V-0
Terminal : Copper Alloy
2. Finish :
Terminal : Selected Gold on Contact Area,
1u" Min. Gold on Solder Tails,
Both over 50u" Min. Ni Under-plated Overall

Dimension Information:

Part No.	Dim.	Dim.A	Dim.B
BCC25-PR40X-03		10.00	5.00
BCC25-PR40X-04		12.50	7.50
BCC25-PR40X-05		15.00	10.00
BCC25-PR40X-06		17.50	12.50
BCC25-PR40X-07		20.00	15.00
BCC25-PR40X-08		22.50	17.50
BCC25-PR40X-09		25.00	20.00
BCC25-PR40X-10		27.50	22.50

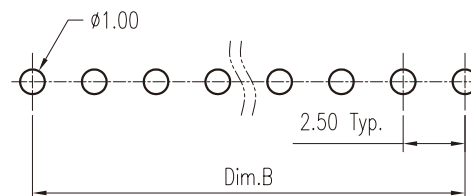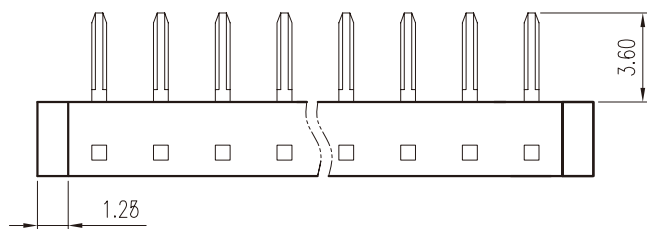

Recommended P.C.B. Layout
Layout Tolerance = ± 0.05 mm

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1


DATE

SIZE A4

PPOJECTION

TOLERANCES ARE

X, $\pm$
.X, $\pm$
.XX, $\pm$
.XXX, $\pm$
ANG, $\pm$



ORDER INFORMATION

BCC25-PR40X-xx-LF

SERIES

03~10WAY






NON POST

HIGH 4.0mm

DIP 90°

MALE

DESCRIPTION: 2.5mm Pitch Battery Conn. Male Type

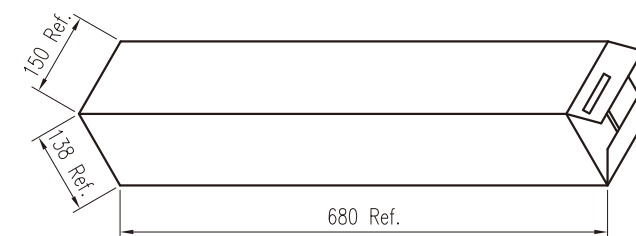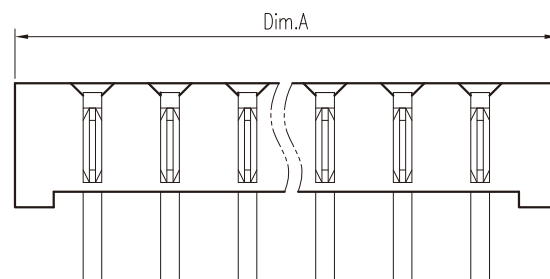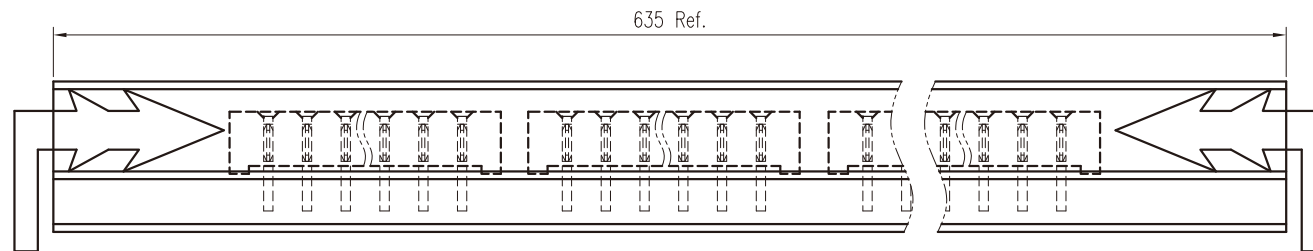

Carton

Part No.	Dim.A	Quantity for Tube
BCC25-PR40X-03	10.0	60 PCS
BCC25-PR40X-04	12.5	48 PCS
BCC25-PR40X-05	15	40 PCS
BCC25-PR40X-06	17.5	34 PCS
BCC25-PR40X-07	20	30 PCS
BCC25-PR40X-08	22.5	27 PCS
BCC25-PR40X-09	25	24 PCS
BCC25-PR40X-10	27.5	22 PCS

Notes:

- Packing Material :
Tube : G-020200-00001 / PVC
Carton : G-010100-00001 / Corrugated Cardboard
- 168 Tube / Carton

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

BCC25-PR40X-xx-LF

SERIES
LEADFREE
03~10WAY
NON POST
HIGH 4.0mm
DIP 90°
MALE

DESCRIPTION: Packing for 2.5mm Pitch Battery Conn. Male Type