

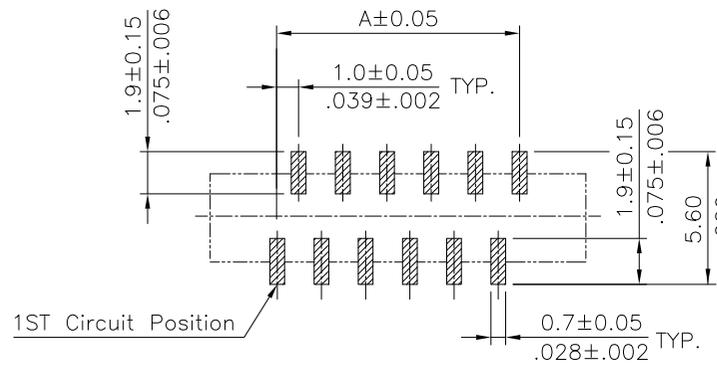
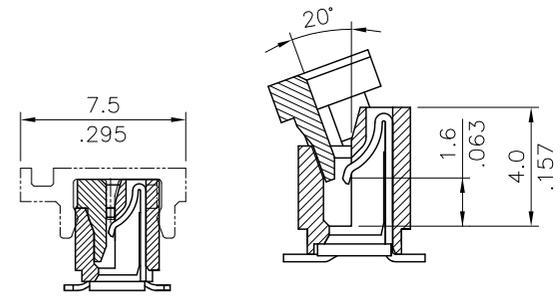



Material:
 * Insulation: Nylon 6T UL 94V-0
 Color Nature
 △ * Slider: Nylon 6T UL 94V-0
 Color Black
 * Contact: Phosphor Bronze
 A = 1.00 * No. of Spaces
 B = A + 7.2
 C = A + 2.1
 * Available in 4 through 32 circuits

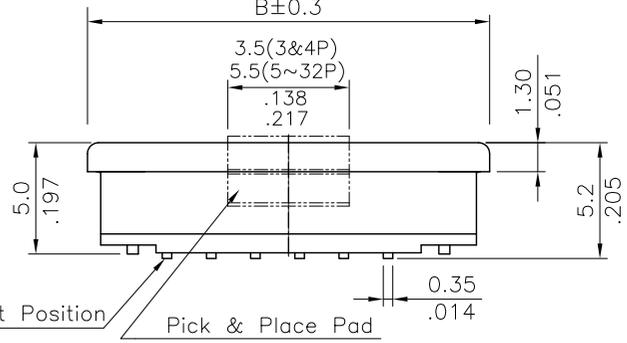

Recommended P.C. Board Layout

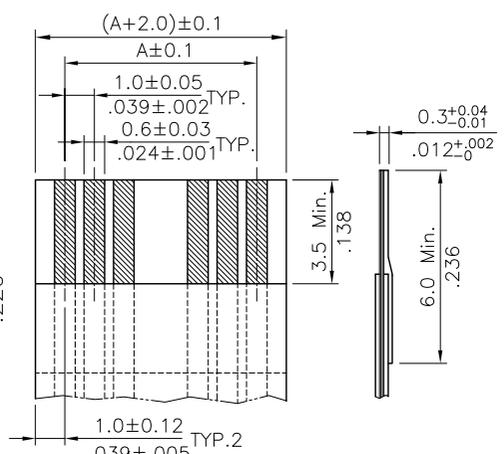

* ACCOMMODATED FFC

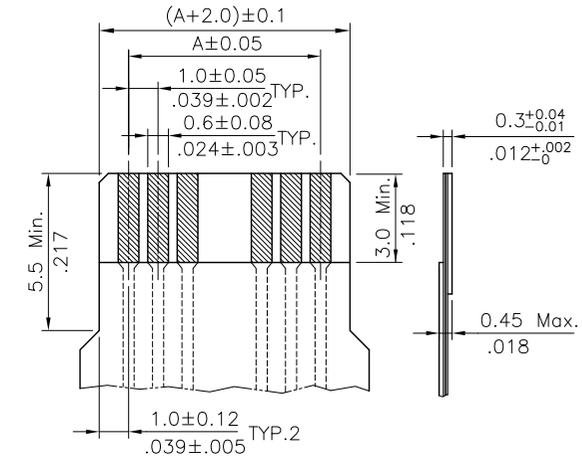

* ACCOMMODATED FPC

RoHS Compliant

TOLERANCES ARE



DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X, ±
 X, ±
 .XX ±
 .XXX ±
 ANG ±

PPOJECTION




ORDER INFORMATION

FPA-VZAL52CR-xx-LF
 SERIES | | | | | LEAD FREE
 | | | | | 04~32WAY
 180°SMT REEL
 ZIF CAP HIGH 5.2mm
 SINGLE CONTACT L TYPE FOOT POSITION

DESCRIPTION:

煜倫股份有限公司



www.morethanall.com

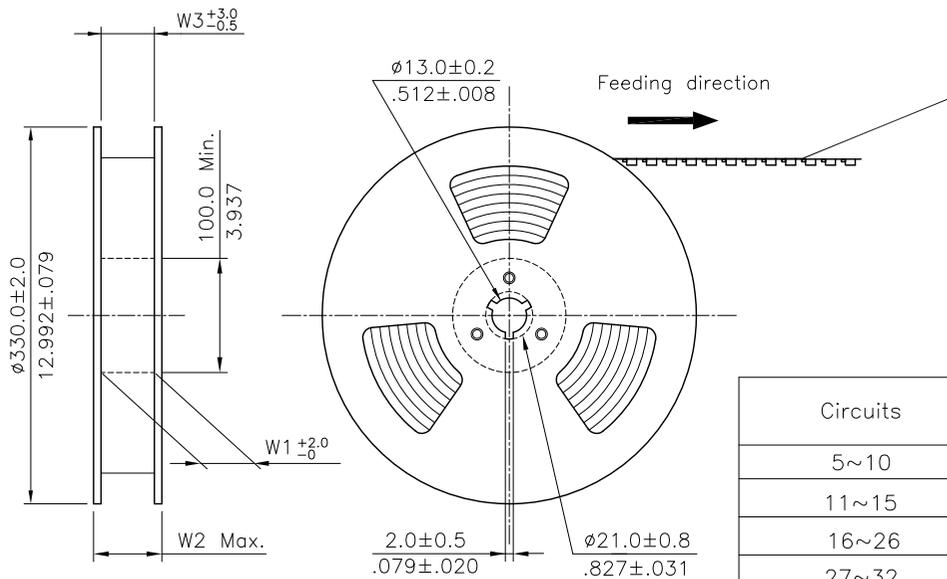


NOTE :

- * Reel Material : Corrugated Paper
- * Carrier Material : Clear, Conductive Polystyrene Alloy
- * Cover Tape Material : Polyester
- * Cover Tape Peel Strength : 0.1N – 1.3N
- * Carrier camber is within 1mm in 250mm
- * All dimensions meet EIA-481-B requirements.
- * Quantity : 800 PCS/Reel

Circuits	Dimension					Packing (Reel/Caton)
	E	F	W1	W2	W3	
5~10	24.0(.945)	-	24.5(.965)	30.5(1.201)	24.5(.965)	9
11~15	32.0(1.260)	28.40(1.118)	32.5(1.280)	38.5(1.516)	32.5(1.280)	7
16~26	44.0(1.732)	40.40(1.591)	44.5(1.752)	50.5(1.988)	44.5(1.752)	5
27~32	56.0(2.205)	52.40(2.063)	56.5(2.224)	62.5(2.461)	56.5(2.224)	3

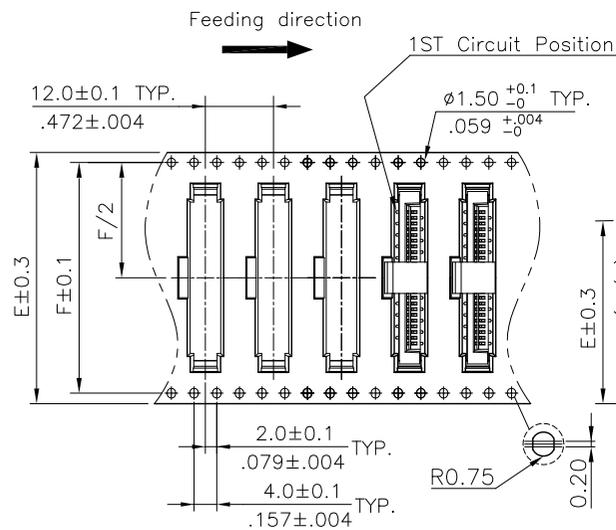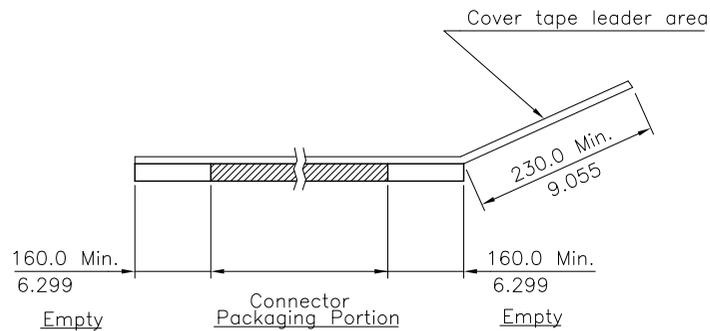

WIDTH : 32, 44 & 56 mm Carrier

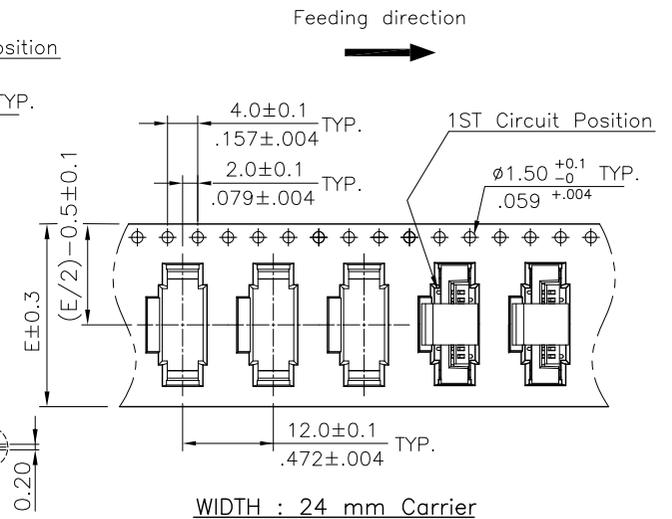

WIDTH : 24 mm Carrier

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X, ±

CHECKED BY GENIUS

.X ±

UNIT / mm

SCALE 1 : 1

.XX ±

DATE

.XXX ±

ANG ±

SIZE A4

PPOJECTION



ORDER INFORMATION

FPA-VZAL52CR-xx-LF
SERIES | | | | | LEAD FREE
180°SMT | | | | | REEL
ZIF | | | | | CAP HIGH 5.2mm
SINGLE CONTACT | | | | | L TYPE FOOT POSITION

DESCRIPTION:

煜倫股份有限公司

www.morethanall.com