



NO.	NAME	MATERIAL	FINISH	QTY
1	GROUND TERM.	PHOS.BRONZE 0.25	TIN PLATED	1
2	TIP TERM.	PHOS.BRONZE 0.25	TIN PLATED	1
3	RING TERM.	PHOS.BRONZE 0.25	TIN PLATED	1
4	HOUSING	PBT G.F.	BLACK	1

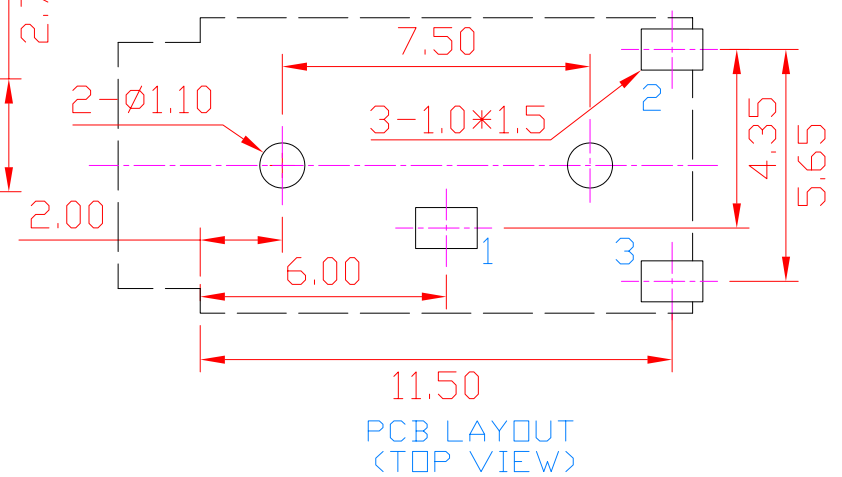

Specification:
 Contact Resistance: 30m Ohm. Max. At AC 100mA Max.1KHz
 Insulation Resistance: 100M Ohm Min. At 500V DC.
 Rated Voltage And Current: DC 12V,2A Max ; AC 100V,1A Max.
 Dielectric Withstanding Voltage: 500V AC For 1 Minute.
 Durability (Life Test):
 A: For Phosphor Bronze 1500 Cycles Minimun.
 Insertion Force: 0.3~3.0 Kg.
 Extraction Force: 0.3~3.0Kg.




MODEL NO.	PJ-R27-03 (PC99 COLOR)					
	A	B	C	D	E	F
HOUSING COLOR	PINK	BLACK	LIME	YELLOW	ORANGE	LIGHT BLUE
PANTONE	701C		577C	123C	157C	284C

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES
 煜倫股份有限公司
 www.morethanall.com

DRAWING BY CY	X. ± 0.38
CHECKED BY GENIUS	.X ± 0.25
UNIT / mm	.XX ± 0.13
SCALE 1 : 1	.XXX ± 0.05
DATE	ANG ±
SIZE A4	P PROJECTION



ORDER INFORMATION

PJ-R27xx-03-LF
 SERIES | LEADFREE
 03 WAY
 DIP 90° | BLANK:BLACK
 POST 2.0+7.5mm | PK:PINK
 LM:LIME | OR:ORANGE
 YL:YELLOW | LB:LIGHT BLUE

DESCRIPTION: Ø3.5 EARPHONE JACK FLAT 3 PIN DIP