
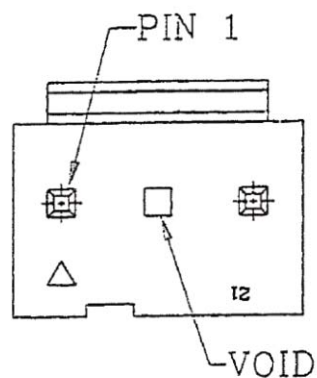
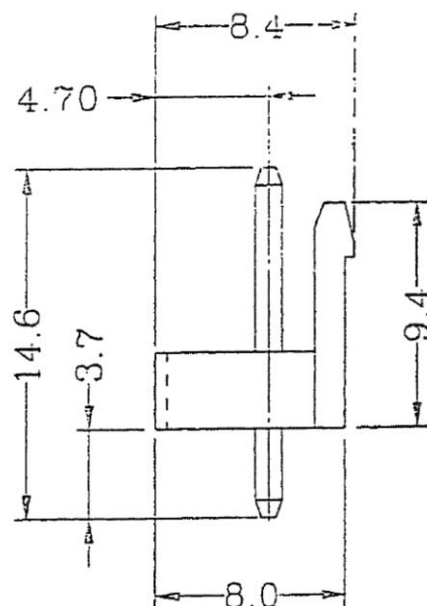


Material: Insulator: Nylon 66 UL 94V-0
 Contact: 1.14mm Tin Plated Square Pin
 D: Void 2nd Pin
 Unit quantity: 1000 Pcs/Bag

P.C.B. LAYOUT

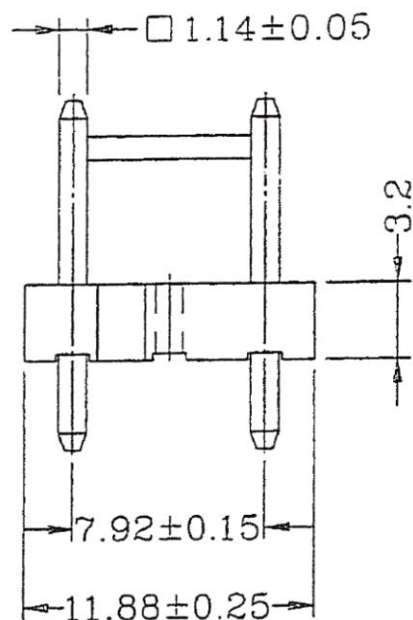

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant


DRAWING BY CY
 CHECKED BY GENIUS
 UNIT / mm SCALE 1 : 1
 DATE

TOLERANCES ARE

X. ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±

SIZE A4

PPOJECTION



ORDER INFORMATION

VA-D-02-LF
 SERIES LEADFREE
 02WAY
 DIP 180°

DESCRIPTION: