


NUT

RECOMMEND PANEL CUT-OUT

1. MATERIAL :
  - 1-1. HOUSING : PA66 UL94V-0 ; COLOR : BLACK
  - 1-2. CONTACT : BRASS
  - 1-3. NUT : BRASS
  - 1-4. SHELL : BRASS
  - 1-5. O-RING : EPDM
  - 1-6. X-SHELL : Zn ALLOY
2. FINISH :
  - 2-1. CONTACT : 10 MICRO INCHES MIN. GOLD PLATED  
UNDER PLATE : NICKEL
  - 2-2. NUT : NICKEL PLATED
  - 2-3. SHELL : NICKEL PLATED
  - 2-4. X-SHELL : NICKEL PLATED
3. ELECTRICAL SPECIFICATION :
  - 3-1. Rated current : 0.5A
  - 3-2. Rated Voltage : 48V
  - 3-3. Water proof: IPX7
4. Environmental :
  - 4-1. Operation Temperature : -40°C~85°C

RoHS Compliant


TOLERANCES ARE

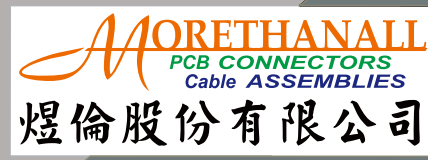

DRAWING BY CY		X. ±
CHECKED BY GENIUS		.X ± 0.20
UNIT / mm	SCALE 1 : 1	.XX ± 0.10
DATE		.XXX ± 0.05
		ANG ± 1°



ORDER INFORMATION

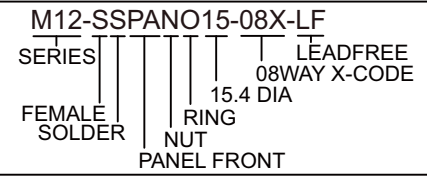

www.morethanall.com

SIZE A4 PPROJECTION

DESCRIPTION: 防水頭 M12 8PIN X-Code (F) 後鎖Pg9 焊線式(無溝槽)