



CONTACT	Mylar (A)
08~80 Pin	5.0*8.0*0.08t
04~06 Pin	5.0*5.0*0.08t

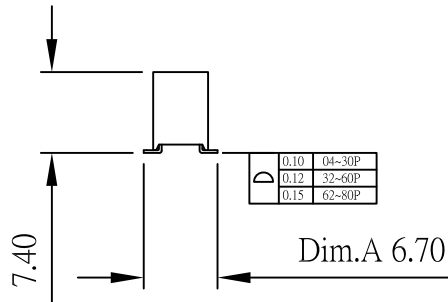

Current Rating and voltage: 3 Amps 250V(r.m.s)
 Insulator Resistance: 5000 Megohms min
 Contact Resistance: 20 m ohms max
 Dielectric Withstanding: 1000 V AC
 Operating Temperature: - 40° ~ +105° C
 Max Processing Temp: 230° C for 60 seconds
 Max Processing Temp: 260° C for 10 seconds
 Contact Material: Phosphor Bronze
 Insulator Material: High Temperature Plastic, UL 94V-0
 Finish: Standard: Gold Flash all over

Recommended P.C. Board
 SMD Layout

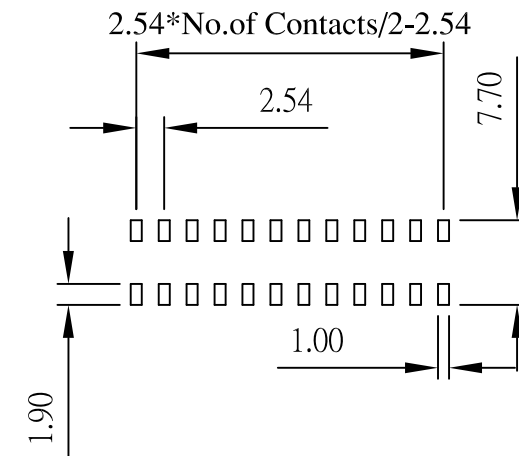

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PJECTION

X. ±
 .X ± 0.30
 .XX ± 0.20
 .XXX ± 0.10
 ANG ±



ORDER INFORMATION

F-V74XC-2Xxx-LF
 SERIES | MYLAR | LEADFREE
 180° SMT | NON POST | 2X02:04WAY
 HIGH 7.4mm | 2X40:80WAY

DESCRIPTION:

煜倫股份有限公司

www.morethanall.com